

10/553857

EXPRESS MAIL NO. EV 594029826 US
ATTORNEY DOCKET NO. 148523.00000
Customer No. 25207

JC20 Rec'd PCT/PTO 20 OCT 2005

5

APPLICATION FOR UNITED STATES PATENT

10

TITLE:

15

**APPARATUS ADAPTED TO PERFORM AS COMPRESSOR, MOTOR, PUMP
AND INTERNAL COMBUSTION MACHINE**

INVENTOR:

20

Das Ajee Kamath

Technical Field

JC20 Rec'd PCT/PTO 20 OCT 2005

[001] This invention relates generally to a rotary apparatus, adapted to perform as compressor, pump, motor metering device or an internal combustion engine and more particularly to a radial vane type rotary fluid handling device characterized by two sleeves
5 fitted with vanes such that they are independent of each other and relative motion between the vanes is used to achieve thermodynamic gas cycles.

Objective of the Invention

[002] The objective here is to achieve a typical gas cycle as in conventional internal
10 combustion engines, compressor etc, using parts described further. The parts and their arrangement in this apparatus are such that it is possible to achieve different gas cycles during its operation, by movement of a set of cam followers, timing device.

Summary of the Invention

[003] A rotary apparatus, adapted to perform as, compressor, pump, motor, metering
15 device or an internal combustion engine comprising of two identical vanes, two hollow cylindrical sleeves, hollow cylindrical liner, cams and associated linkages, couplings, shaft, clutch and braking arrangement; said vanes are fitted on to the curved surface of the sleeves, one vane on each sleeve, such that the vanes are radial to sleeve's curved surface and at one of the ends of each sleeve in such a way that half of the vane's surface protrudes out of the sleeve's
20 end; and the said ends, fitted with vanes are placed adjacent, with the vanes angularly displaced so that said vanes are displaced from each other by a defined angle at all times; said sleeves so placed that their axis, the one passing through the center of their end surfaces, lay on one line; said curved surfaces where the vanes are attached on the sleeves, is such that it allows rotation of the adjacent vane and sleeve, about the said axis ; a liner is provide; said liner along with the
25 sleeve surface to form an enclosure; said liner's inner surface is contoured along the path traced by vane edge while rotating about the said axis; said vanes divide the said enclosure formed inside the liner into two sealed chambers and enclosure is sealed from spaces outside the enclosure; said two sleeves, are coupled and uncoupled with. a shaft by means of coupling arrangement actuated by came; said cams are placed on and, or driven by the sleeves; said cams
30 actuate said braking arrangement such that each vane is held at a predetermined position

alternately, and the vanes are free to rotate through an defined angle alternately; said cams allows both vanes to rotate simultaneously through an redefined angle and defines the angle by which the vanes are separated, rotated simultaneously or independently.

5 **Brief Description of the Drawings**

[004] Fig 1-shows simplified fig. depicting elevation and side view of sleeve.

[005] Fig 2-shows simplified fig. depicting elevation and side view of liner.

[006] Fig 3-shows simplified fig. depicting elevation and side view of the vane.

[007] Fig 4-shows simplified fig. depicting the vane and sleeve fitting.

10 [008] Fig 5-shows simplified fig. depicting liner, vane and sleeve assembly. a) Liner

[009] Fig 6-shows the simplified fig. depicting line diagram of liner, vane and sleeve.

[0010] Fig 7-shows the simplified fig. depicting v1 and v2 at initial position with an inclusive angle of 2α between them.

[0011] Fig 8-shows the simplified fig. depicting line diagram of initial movement of v1.

15 [0012] Fig 9-shows the simplified fig. depicting line diagram with v1 at position z.

[0013] Fig 10-shows the simplified fig. depicting line diagram with v1 and v2 at position Y and position X respectively.

[0014] Fig 11-shows the simplified fig. depicting v1 and v2 moving simultaneously from position Y and position Z respectively.

20 [0015] Fig 12-shows the simplified fig. depicting v2 and v1 at position Y and position X respectively (initial position).

[0016] Fig 13-shows simplified diagram depicting shaft placed in hollow annular space of the sleeve.

[0017] Fig 13a-shows a simplified diagram of the cams fitted on sleeves. a) FL 1-follower
25 of cam C 1. b) FL2-follower of cam C2.

[0018] Fig 13b-shows line diagram of a typical vane positioning CAM.

[0019] Fig 14-shows the sliding friction clutch. a) SL-splines b) Fp-Friction pad

[0020] Fig 17 to Fig. 23-shows the various steps of apparatus working as single stroke IC engine. a) ExV-Exhaust valve b) SuV-Suction valve.

[0021] Fig 24 to Fig. 31-shows the various steps when apparatus working as Two stroke IC engine. a) E1, E2-Exhaust Valves c) Sul, Su2- Suction valves.

[0022] Fig 32 a-shows different view of cam operating suction valve and exhaust valve of single stroke IC engine. a) Pr-Profile b) Bc-Base circle.

[0023] Fig 32b-shows outline fig. of cams for operating valves and cams for positioning vanes, fitted on sleeve.

10 [0024] Fig 33-shows different view of cam operating valves for two stroke engine. a) PrS-Profile for suction valve. b) PrE-Profile for exhaust valve.

[0025] Fig 34-shows sleeve without depression. a) CSF-Curved surface.

15 [0026] Fig 35-shows sleeve with depression b) st-step on sleeve c) Flo-cooling fluid outlet hole d) Rcf-receiving cone for sliding friction clutch. e) Fli-cooling fluid inlet line f) DPr-depression.

[0027] Fig 36-shows vane a) stvs-strip to fit vane on sleeve b) Pis-Piston. c) Grps-groove for fitting piston rings.

[0028] Fig 37shows liner. a) SOH-split on outer half. b) PKV-pocket for valve. c) OH capital-Piter j a ; f d) SIH-split on inner half.

20

Detailed Description of the Invention

[0029] Initially the parts, their arrangement and functions are described and depicted with the help of simplified geometric figures for easy perception and latter the machine parts are described in detail.

25 [0030] The basic parts are:- 1. Sleeve 2. Liner. Vane 4. Cams 5. Couplings 1) Sleeve. There are two numbers of sleeves. A hollow cylinder of outer diameter'd' length'T' and thickness't' depicts these sleeves. Hereafter the two sleeves are referred as S1 and S2.

[0031] The Sleeves are depicted in fig. No 1 2) Liner The liner is depicted by hollow cylinder of inner diameter "D", length by "L" and thickness "T" with circular cover plates on both ends. The cover plates have a hole of diameter "d". (The whole diameter is same as that of sleeve's outer diameter). The liner is depicted in fig. No 2.

5 [0032] 3) Vanes. There are two numbers of Vanes. The vanes are depicted by a rectangular plane of length 'L' and width "r" such that $r = (D-d)/2$. Hereafter the two vanes are referred to as V 1 and V2. Shown in fig. No 3.

[0033] The half length of one edge (of length 'L') of V1, V2 is rigidly fixed on S1, S2 respectively, such that a) The plane (of surface) of V 1, V2 is radial to S 1, S2. b) V 1, V2 are
10 fitted on one of the two ends of S 1, S2. c) Half length of fixed edge projects out of the sleeve end.

[0034] The V1, S1 fitting is here referred to as VS1, The V2, S2 fitting is here referred to as VS2 The Vane and Sleeve fitting is depicted in fig. No. 4.

[0035] VS1 and VS2 are fitted in the liner, such that a) V 1 and V2 are inside the liner, b)
15 The three edges (other than the one fitted rigidly to sleeve) of both vanes, touch the inner surface of the liner, c) Half length of vane edge (the one projecting out of the sleeve ends) touch the outer curved surfaces of facing sleeve, d) The ends surfaces of the sleeves present inside the liner touch each other, e) Lengths of $(L-L/2)$ of both sleeves project out of the end cover plate holes of liner, and f) The axis passing through the center of the circular ends of
20 liner, S 1 and S2 is collinear. Hereafter this axis is referred as Central axis.

[0036] The line diagram of isometric view of liner, vane and sleeve fitting is depicted in fig. No. 5.

[0037] VS1 and VS2 separate the space inside the liner into two parts. It is assumed that a) Both the spaces are isolated from each other and to the annular space of the sleeves i. e. no
25 fluid can leak past from the sides of the vanes, nor through the end surfaces of the sleeves, touching each other inside the liner. b) The spaces inside the liner are isolated from the space outside the liner.

[0038] Hereafter the space on right side (clockwise side) of a vane is addressed as space ahead of vane; similarly the space on the left-hand side (counter clockwise side) of the vane is addressed as space behind of vane.

5 [0039] The simplified line diagram of side view of liner, VS1, VS2 fitting (with vanes depicted by radial lines) is depicted in fig. No. 6.

[0040] The description of functioning of various components of the machine with help of simplified line diagrams of side view of liner with vanes (as in fig. No. 6) is as follows.

10 [0041] Initial position Initially V1, V2 are placed part by 2 alpha degrees, such that a) V1, V2 lie on either side of the vertical plane, b) The vertical plane bisects the inclusive angle between V1 and V2.

[0042] This Initial position of the V1 is hereafter referred to as 'POSITION X, and that of V2 as 'POSITION Y': the above mentioned is depicted in fig. No. 7.

[0043] Now VS 1 is rotated about its central axis in clockwise direction.

15 [0044] This leads to reduction of volume of space ahead of V I and increase in volume of space behind V1, thus any gaseous fluid present in these spaces gets compressed and rarefied respectively. This compression and expansion form a part of the thermodynamic gas cycle. The above mentioned is depicted in fig. No. 8.

20 [0045] As VS1 is rotated through (360-4 alpha) degrees it is in a position, referred to as "POSTION Z' hereafter. On attaining this position both VS1 and VS2 are rotated. The same is depicted in fig. no. 9.

[0046] When VS1, VS2 reach POSITION Y, POSITION X respectively, VS1 is stopped and VS2 continues to rotate.

The same is depicted in fig. No. 10.

25 [0047] Like VS1, when VS2 attains POSITION Z, then both VS1 & VS2 are rotated till they attain POSITION X & POSITION Y respectively.

[0048] The same is depicted in fig. No. 11 and No. 12.

[0049] Now VS1 start's rotating and the full cycle is repeated.

[0050] On continuously rotating the vanes in this fashion, the two vanes are simultaneously at POSITION X, POSITION Y and POSITION X alternately, one in every 360-degree rotation of any of the two vanes. The vanes attaining initial position once in every rotation facilitates placement of accessories like injector, valves/ports, etc, at fixed, well defined points on the liner.

[0051] Heat is added to compressed gases trapped between vanes at POSITION X and POSITION Y.

[0052] The inclusive angle of 2α between VI and V2 is of particular importance, as this is the minimum angle of separation between vanes at all times (i. e. vane can only reach a position where it is at an angle of 2α from the other vane and not less than 2α).

[0053] This angle of separation defines the compression ratio. By altering this angle, Compression ratio can be changed (with volume inside liner and sleeve's outside diameter, maintained constant) By placing conventional suction (Intake), delivery (exhaust)/Valves, ports/Fuel Injector, (Spark Plug) at suitable points on the liner, the machine acts as compressor or internal combustion engine or motor.

[0054] The above-mentioned pattern of vane movements and a continual rotary output is achieved with help components, described below.

[0055] 6) Shaft 7) Cams and associated linkages 8) Sliding friction clutch 9) brake bands
Shaft The shaft is of length 'A' and diameter 'B' such that 'A' > 2 times 'T' and 'B' < {d'-t'}. are dimension's of the sleeve) The shaft passes through the hollow annular space in the sleeves and protrudes out of the ends. It is depicted in fig. No. 13.

[0056] Cams Two no cams are used, one fitted on each sleeve.

[0057] The cams are concentric to the sleeve and its profile is negative and the profile ends makes an angle of 4α to the center. Cam fitted on S1, S2 are named as C1, C2 respectively.

The place bisecting the profile of C1 is parallel to the plane of the vane VI.

[0058] Similarly the plane bisecting the profile of C2 is parallel to the plane of the vane V2. This shown in fig. no. 13a.

[0059] The cam followers actuate linkages so as to engage and disengage the sleeves with the shaft. At the same time actuating brake bands to hold and release the sleeves.

[0060] Description of cam operation follows. When V1 is at POSTION X the follower of Cl is just out of the profile, disengaging S2 from the shaft and engaging brake bands so as to
5 hold S2 at rest. On V1 reaching POSITION Z, follower of cl rides on the profile releasing brake band of S2 and engaging it with the shaft. Now both the sleeves rotate.

[0061] As V2 brake band holds it stationary. At this point follower of Cl is at center of profile i.e. on line bisecting the profile. The process is repeated and desired movement of VS1 & VS2, as mentioned earlier, is achieved.

10 [0062] It is seen that the angle of profile defines the angle 2α degrees i.e. the minimum angle of separation of the vanes is equal to the angle that the beginning and end of profile makes to the center of the cam. This angle of profile if increased decreases the compression ratio and vice versa. The cam is so shaped that angle of the profile gradually increases and thus moving the cam follower along the central axis results in variation of compression ratio.

15 [0063] The cam is shown in fig. No. 13b.

[0064] Sliding friction clutch. There are two sliding friction clutch. The clutches are fitted on the shaft, one on each of its ends. The friction clutch has slots on its inner diameter and makes sliding fit on similar splines on the shaft. The shape and features of sliding friction clutch are shown in fig. No. 14. The sleeve end surface is conically shaped so as to receive the
20 conical surface of sliding friction clutch i. e. the angle of cone (negative on sleeve and positive on sliding friction clutch) is equal. When the clutch is pressed by linkages, operated by cams, against the sleeve, the friction between sleeve and clutch surfaces engages the shaft and sleeve.

[0065] Brake bands. Brake bands or means of positive locking by means of conventional ratchet arrangement is used to keep the sleeve immobile when it is at rest.

25 [0066] The brake band is a strip with friction pad lining on its inner surface has a small worlcing clearance from the surface of the sleeve. A lever against a spring force maintains the clearance.

[0067] Valves The valves used are same as that used in conventional reciprocatory I. C. engines. Circles on the end cover plates of the liner depict the valves/ports.

[0068] The parts of this engine can be arranged so as to result in either a single stroke or a two- stroke engine. a) Sin le stroke There are two valves installed on the liner, one suction and one exhaust. They are angularly displaced by an angle of beta. The exhaust valve lies in the space behind vane at POSITION X and ahead of vane at POSITION Y. The valves are opened and closed, so as to communicate the space inside the liner to space outside it. Linkages actuated by cams and its followers open them.

[0069] Step-1) Initially V1 and V2 are at POSITION X and POSITION Y. Please refer to fig. No. 17. The fig. also depicts the exhaust and suction valves installed on the liner. The suction and exhaust valves are in closed position.

[0070] Now V I is rotated. The gases ahead of V1 gets compressed.

[0071] Step-2) As VI reaches a position such that it makes an angle of theta to POSITION Z, the exhaust and suction valves open. This position of vane is referred as POSITION Z1 here after. The angle theta is such that the vane has rotated past the suction valve and space ahead of rotating vane is sealed from suction valve. Please refer to fig. No. 18.

[0072] Step-3) On VI reaching POSITION Z the suction and discharge valves are closed.

[0073] Please refer fig. No. 19.

[0074] Step-4) Now both vanes rotate and V1 and V2 reach POSITION Y and POSITION X respectively. Please refer fig. No. 20.

[0075] At this point heat is added to the compressed gas (similar to conventional I. C. engines).

[0076] The injector/spark plug is placed on the liner between POSITION X and POSITION Y.

[0077] Now V20 rotates. The gases behind V2 expand and ahead of V2 gets compressed. The expanding gases push V2. This is the power stroke for V2.

[0078] Step-S) As V2 reaches POSITION Z1 exhaust and suction valves open. Exhaust in space behind V2 is scavenged and fresh charge is introduced. Shown in fig. No. 21.

[0079] StepR-6) This process takes places till V2 reaches POSITION Z and exhaust and suction valves are closed as shown in fig. No. 22.

[0080] Step-7) Now both V2, VI rotate and reach POSITION Y, POSITION X respectively.

[0081] This is the initial position. V2 is now put to rest. Heat addition to the compressed gases ahead of V2 takes place now. Please refer fig. No. 23.

5 [0082] Now power stroke for V 1 starts.

[0083] Now steps-1 to Step-7 repeats successively.

[0084] The position of valves with respect to vertical plane, the initial position of vanes, angles alpha and theta and volume of spaces inside the liner, are such that the compressed gas or combustible gaseous charge (compression and expansion is assumed to be adiabatic) can
10 result in spontaneous ignition, either by self ignition or by spark as in conventional I. C. engines. b) Two stroke There are two valves, one suction and one exhaust installed on the liner. They are angularly displaced by an angle gamma.

[0085] The suction valves lies in the space behind vane when the vane is at POSITION X. space outside it. Linkages actuated by cams and its followers open them.

15 [0086] For each understanding of mechanism involved, two suction and two exhaust valves are shown in the Fig. They are names Sul, Su2, El, E2.

[0087] Step-1) Initially V1, V2 are at POSITION X, POSITION Y respectively. Please refer fi No. 24.

[0088] Now rotation of V1 is initiated, at the same time Sul opens. All remaining valves are
20 closed at this point. The vacuum created behind VI, due to its rotation, sucks in charge.

[0089] The gas ahead of V1 gets compressed.

[0090] Step-2) As V1 reaches POSITION Z, SU 1 IS CLOSED. Shown in fig. No. 25.

[0091] Step-3) Both V1, V2 now rotate and reach at POSITION Y, POSITION X respectively.

25 [0092] Heat is now added to compressed gases inside the liner. (Ignition of charge). VI is now stopped and V2 rotates. This is the power stroke for V2 as shown in fig. No. 26.

[0093] Step-4) As V2 rotates gas ahead of V2 gets compressed. V2 reaches POSITION Z as shown in Fig. No. 27.

[0094] Step-5) Now both V2, V1 rotate, reach POSITION Y, POSITION X respectively. Heat is now added to compressed gas ahead of V2 (Ignition of charge. E2 is now opened as shown in Fig. No. 28).

[0095] Now V1 is rotated and V2 is stationary. The gases behind V1 expand (power stroke for V1) and the gas ahead of V1 is expelled (heat rejection occurs).

[0096] Step-6) As V1 reaches POSITION Z, E2 closes. Shown in Fig. No. 29.

[0097] Step-7) Both V1, V2 rotate to reach POSITION Y, POSITION X respectively. At this point E1 and Su2 opens. Now V1 stops and V2 rotates.

[0098] V2 now expels exhaust ahead of it and sucks new charge behind it as shown in Fig. No. 30.

[0099] Step-8) When V2 reaches to POSITION Z, E1 and Su2 are now closed as shown in fig. No. 31.

[00100] Step-9) Both V1 and V2 rotate and reach POSITION X and POSITION V respectively i. e. the initial position. Now step 1 to step 9 is repeated.

[00101] 1. The volume inside the liner, minimum angle of separation if altered results in change of compression ratio.

[00102] In both type of above mentioned engines valves are opened and closed by linkages actuated by cams. As the valve function depends on vane position, individual Cams for each of the vanes is fitted on their respective sleeve or fitted on separate shafts, driven by its respective sleeve.

[00103] The cam for operating suction and exhaust valve of single stroke type engine is shown in fig. No. 32a. The cam for operating suction and exhaust valve of two stroke type engine is shown in fig. No. 33. The out line Fig. of cams for operating valves and POSITION cams is shown in fig. no. 32b.

[00104] Cams for single stroke engine There are two cams, namely 'Ca 1' and 'Ca 2' placed S1 and S2 respectively, Ca 1 actuate linkages for opening and closing suction and exhaust

valves when V1 rotates. Ca 2 actuate linkages for opening and closing suction and exhaust valves when V2 rotates.

[00105] There are two profiles on each cam, axially displaced such that the path traced by a profile during its full rotation does not intersect or interfere, with that of the other profile.

5 [00106] The profiles makes an angle of theta to the center of the cam.

[00107] The followers of cams are so placed that when a vane reaches POSITION Z1, it begins to ride over the profile thus actuating valves. There are two similar cams, for operating fuel pumps.

[00108] Cams for two stroke engine There are two cams, namely Cfl and Cf2.

10 [00109] The cams are rigidly fixed on two shafts independent of each other. The shaft having Cfl fitted on it is driven by S and shaft having Cf2 fitted on it is driven by S2. As it is observed that each valve is operated once every 720 degrees of rotation the shaft is driven at half the speed of that of the sleeves. There are two profiles on each of the two cams. There are two profiles on each cam, axially displaced such that the path traced by a profile during its full
15 rotation does not intersect or interfere with that of the other profile.

[00110] The profile for such valve makes an angle of $(180-2\alpha)$ degrees to the center of the cam. If the follower is so placed that when the vane is vertical (i.e. at angle of α from POSITION X) the follower is angularly displaced by half α degrees from the beginning of the profile.

20 [00111] As the exhaust valve opens only after a vane undergoes power stroke and reaches POSITION V and it remains open till the vane is at that position, the profile is at $(180+\alpha)$ degrees from the end of the profile for suction valve. Please refer fig. 33.

[00112] There are two similar cams, for operating fuel pumps, placed on shaft having Cfl and Cf2.

25 [00113] The detail description of parts now follows.

[00114] The parts, their fitting arrangement and exploded view of fittings are illustrated in fig. No. 34 to Fig. No. 51.

[00115] SLEEVE. The sleeve as described earlier is a hollow cylinder, but has step of larger diameter at one of its ends. The end surface at the larger diameter end is curved such that it forms a quarter of a circular hollow ring. The other end surface is conically shaped, same as that of the sliding friction clutch. The curved surface at the larger end has two depression. A sleeve without depression is shown in fig. no. 34 A sleeve with depression is shown in fig. No. 35.

[00116] VANES. As previously described there are two vanes, rigidly fixed on the sleeves (one on each sleeve) and is required to rotate with the sleeve, inside the liner. As described earlier the vane while rotating is required to sweep the volume inside the liner.

[00117] It constitutes of a circular plate of diameter less than 'h'. It is attached to a strip which is to be rigidly fixed on to the sleeve's curved surfaced left uncovered by the liner. Two pistons with grooves are attached to the vane on the opposite sides of vane plate. Piston rings, same as those used in conventional I. C. engines, are fitted in the grooves. The piston rings press against the liner timer surface. Shown in fig. No. 36.

[00118] LINER. The liner is of the shape of a hollow circular quoit/ring (a pipe of circular cross section bent and its ends joined so as to form a hollow circular ring). The inner diameter of the liner hollow (the pipe diameter) is 'h'.

[00119] It is split in outer and inner halves for easy fitting and disassembly. The inner half is further split into two quarters. The outer half and inner quarters are further split.

[00120] The outer and inner halves have steps so as to malce the inner surface overlapping at the ends. Thin polished strips are fitted at the interfaces which rub against each other during operation. The face to face contact of these strips seals of spaces inside the liner from spaces outside.

[00121] The ends are stepped, so as to make the ends overlapping. Clearance is provided at ends to make up for thermal expansion. The ends are made zig zag so that the piston rings (pressing against the inner surface of the liner) can smoothly pass over them during vane rotation. The liner is illustrated in fig. no. 37.

[00122] A section of the liner is illustrated in fig. no. 38.

[00123] A section of the split ends is shown in fig. No. 39.

[00124] One quarter of the liner fits on a sleeve and the outer surface of liner is flush with the curved surface of the sleeve's end face. The quarter portion of the liner that fits on the sleeve, covers the whole curved surface of the sleeve except a small strip where the vane is to be fitted. Liner and vane are fitted on the curved surface of the sleeve and the depression is fully covered by the liner. The depressions now form pockets for cooling fluid. The pockets are communicated to supply and return lines through holes in the sleeves.

[00125] The exploded isometric view of a sleeve and liner inner quarter fitting is illustrated in Fig. No. 40.

[00126] The exploded isometric view of a sleeve, vane and liner inner quarter fitting is illustrated in fig. No. 41.

[00127] The exploded isometric, view of two sleeves and liner inner quarter fitting, with vanes fitted in place is illustrated in Fig. No. 42.

[00128] The isometric view of the sleeve, vane and liner inner quarter fitting is illustrated in fig. No. 43.

[00129] The angular displacement between the radial plane of the grooves of a vane is such that rings fitted in them, press against the inner quarter of the liner, fitted on the same sleeve on which the vane is fitted i.e. the distance between the grooves of a vane fitted on a sleeve, is more than the width of the strip left uncovered by the liner inner quarter fitted on the sleeve.

[00130] The liner's outer half and inner quarters are flanged along the splitting lines. The flanges of inner quarter rest against corresponding surfaces of the sleeve. Dowel pins on the sleeve surface restrict the liner inner quarter from slipping during operation. The pins are provided only at one end leaving the other end free to expand during operation.

[00131] The liner's outer half is placed over the inner half and the former is enclosed in a casing.

[00132] The casing is held together by fasteners at its flanges.

[00133] The flanges of the outer half are further extended to provide a flange parallel to the step on the sleeve.

[00134] These flanges are fitted with bolts so as to press a sliding ring against step on the sleeve.

[00135] Thus pressing the two sleeves against each other. (Rollers can be provided at the sliding ring and sleeve interface to reduce friction).

5 [00136] The exploded isometric view of the outer half of liner and sliding ring, over the sleeve, vane and liner inner half fitting is shown in fig No. 44.

[00137] The exploded isometric view of the components in the previous fig. and the casing is shown in fig. No. 45.

10 [00138] Illustrated in Fig. No. 46 is isometric view of cam and valve operating cam fitting on the sleeve.

[00139] Illustrated in fig. No. 47 is isometric view of complete vane assembly fitted on to sleeves with cams valve operating cams and fuel pump operating cam.

[00140] Illustrate in Fig. No. 48 is top view of the machine, with two parts of liner outer half over the fitting shown in fig. no. 47.

15 [00141] Illustrated in fig. No. 49 is front view of components arrangement shown in previous fig. along with shaft and sliding friction clutch.

[00142] Illustrated in fig. No. 50 is isometric view of machine with casing in place.

[00143] Illustrated in fig. No. 51 is side view of the machine with shaft arranged as in two stroke engine.

20 [00144] ADVANTAGES The rotary I. C. engine has many advantages 1. Compression ratio can be altered during operation by sliding of followers of cams.

[00145] 2. There is no reversal of inertia forces.

[00146] 3. It is possible to reverse the engine easily, that is angularly displacing the CAM profiles w. r. t. CAM followers thus eliminating gearing arrangements.

25 [00147] 4. As the shaft is long the weight of the shaft by itself can serve the purpose of fly wheel.

[00148] 5. The size of the engines is considerably smaller than conventional engines of same power output.

[00149] 6. There is no need to maintain large lubricating oil slumps.

[00150] 7. As the vanes are rigidly fixed to sleeve there is no slapping of vane, as is the case
5 with pistons on liner in conventional I. C. engines. This results in reduced noise and vibration levels.

CLAIMS

What is claimed is:

1. A rotary apparatus adapted to perform as, compressor, pump, motor or an internal
5 combustion engine; said apparatus comprising of two vanes, two hollow cylindrical sleeves,
hollow cylindrical liner, cams and associated linkages, coupling, shaft, clutch and
braking/locking arrangement; said vanes are fitted on to the curved surface of the sleeves, one
vane on each sleeve, such that the vanes are radial to sleeve's curved surface and at one of the
ends of each sleeve; said vanes are so fitted that the vane's surface protrudes out of the sleeve's
10 end; said sleeves placed such that their ends, fitted with vanes are placed adjacent, with the
vanes angularly displaced; said vanes are displaced from each other by a defined angle at all
times; said sleeves so placed that their axis, the one passing through the center of their end
surfaces, lay on one line; said surfaces where the vanes are attached on the sleeves, is such that
it allows rotation of the adjacent vane and sleeve fitting, about the said axis; said vanes are
15 placed inside a liner; said liner along with the sleeve surface forms an enclosure; said liner's
inner surface is contoured along the path traced by vane edge while rotating about the said axis;
said inner surface allows rotation of the vanes about the said axis; said vanes divide the said
enclosure formed inside the liner into two sealed chambers; said enclosure is sealed from
spaces outside the enclosure; said two sleeves, are coupled and uncoupled with a shaft by
20 means of coupling arrangement actuated by cams or other timing devices; said cams or timing
devices are dependent on sleeve position; said cams or timing devices actuate said
braking/locking arrangements such that each vane is held at a predetermined position
alternately, and the vanes are free to rotate through an defined angle alternately; said cams ore
timing devices allow both vanes to rotate simultaneously through an predefined angle; said
25 cams or timing devices defines the angle by which the vanes are separated, rotated
simultaneously or independently in a pattern as described in the complete specification.
2. A rotary apparatus as claimed in claim 1 in which the vane are so fitted that only one
the vane's surface protrudes out of the sleeve's end.

3. A rotary apparatus as claimed in claim 1 in, which the said shaft is external to the sleeves so that the sleeves are not hollow.

4. A rotary apparatus as claimed in claim 1 in, which the said sleeves are driven by or drive a shaft by coupling arrangements through a gearing arrangement.

5 5. A rotary apparatus as claimed in claim 1 in which the sleeve end surfaces adjacent to each other are provided with sealing elements forming a continuous sealing line around said end surfaces blocking a leakage flow as practically possible.

6. A rotary apparatus as claimed in claim 1 in which said vanes are provided with sealing elements blocking a leakage fluid flow across the vane edges and liner inner surface as
10 practically possible.

7. A rotary apparatus as claimed in claim 1 in which sealing arrangements are placed at the liner and sleeve interface blocking a leakage fluid flow across the said liner and sleeve interface as practically possible.

8. A rotary apparatus as claimed in claim 1 in which said enclosure formed within the liner
15 and vanes is communicated or sealed to spaces outside the enclosure.

9. A rotary apparatus as claimed in claim 8 in which the communicating device or flow regulating devices such as valves, is so placed, operated and, or timed, such that the apparatus be used as a compressor, motor, pump or a metering device.

10. A rotary apparatus as claimed in claim 8 wherein means are provided for addition or
20 removal of heat and, or other forms of energy, between spaces within, outside the said enclosure formed by the liner and vanes.


11. A rotary apparatus as claimed in claim 10 wherein the communicating devices and, or means of energy addition and removal are so placed, operated and, or timed, such that the apparatus be used as a prime mover like an internal combustion engine.

25 12. A rotary apparatus as substantially as herein described with reference to figures of accompanying drawings.


ABSTRACT

A rotary apparatus adapted to perform as, compressor, pump, motor or an internal combustion engine; said apparatus comprising of two vanes, two hollow cylindrical sleeves, hollow cylindrical liner, cams and associated linkages, couplings, shaft, clutch and braking/locking arrangement; said vanes are fitted on to the curved surface of the sleeves, one vane on each sleeve, such that the vanes are radial to sleeve's curved surface and at one of the ends of each sleeve so that the vane's surface protrudes out of the sleeve's end; said sleeves placed such that their ends, fitted with vanes are placed adjacent, with the vanes angularly displaced; said vanes are placed inside a liner; said liner's inner surface is contoured along the path traced by vane edge while rotating about the said axis; said inner surface allows rotation of the vanes about the said axis; said vanes divide the said enclosure formed inside the liner into two sealed chambers; enclosure; said two sleeves, are coupled and uncoupled with a shaft by means of coupling arrangement actuated by cams or other timing devices; said cams or timing devices are dependent on sleeve position; said cams or timing devices actuate said braking/locking arrangements such that each vane is held at a predetermined position alternately, and the vanes are free to rotate through an defined angle alternately; said cams or timing devices allow both vanes to rotate simultaneously through a predefined angle; said cams or timing devices defines the angle by which the vanes are separated, rotated simultaneously or independently.

#925820 V1

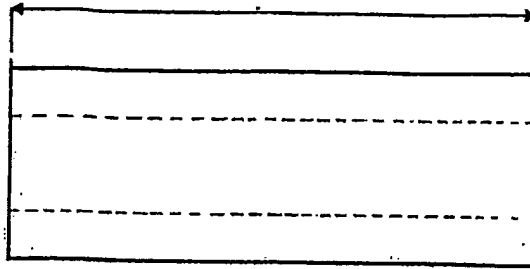


Elevation




Side View

Fig 1b

Fig. 1a

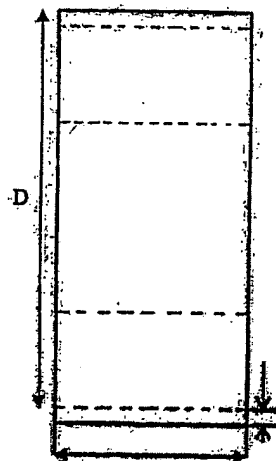


Elevation

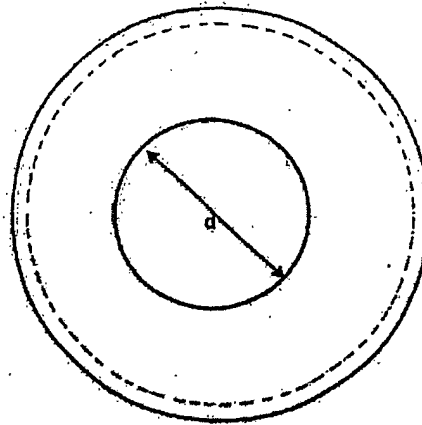

Side View

Fig. 2



Elevation



Side View

Fig. 3

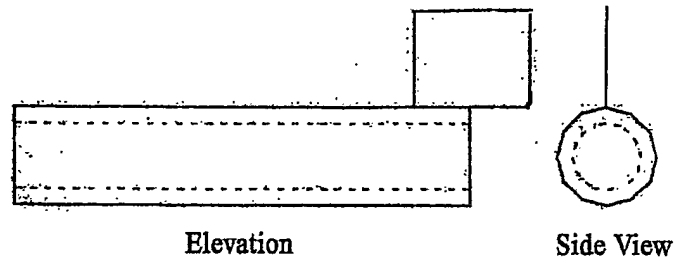


Fig.4

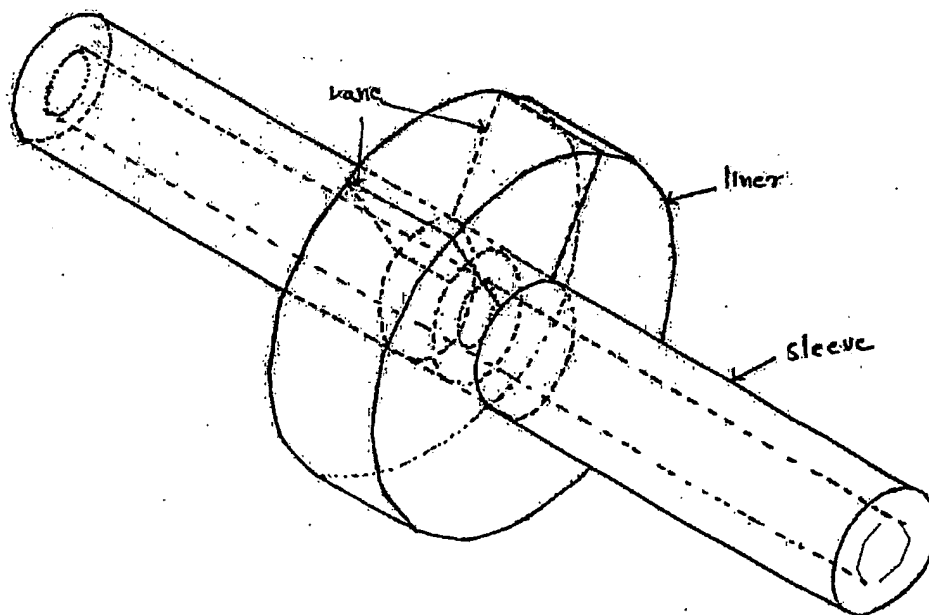


Fig. 5

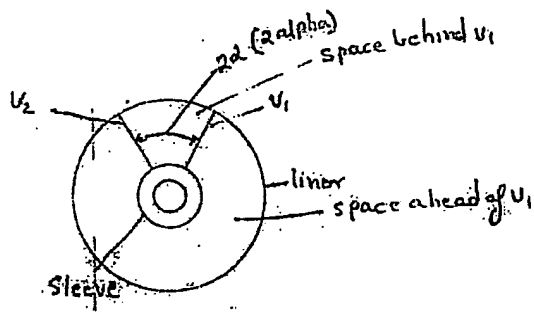


Fig. 6

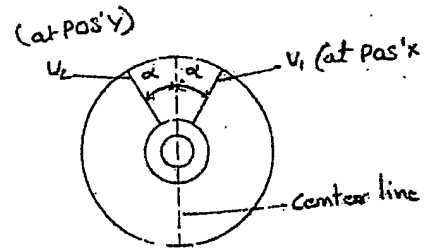


Fig. 7




Fig. 8




Fig. 9

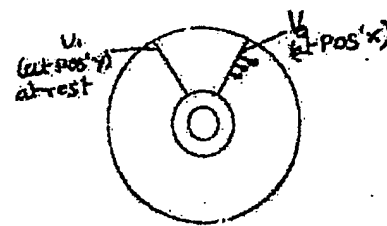


Fig. 10




Fig. 11

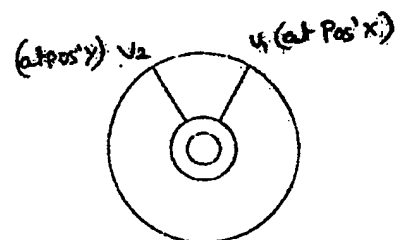


Fig. 12

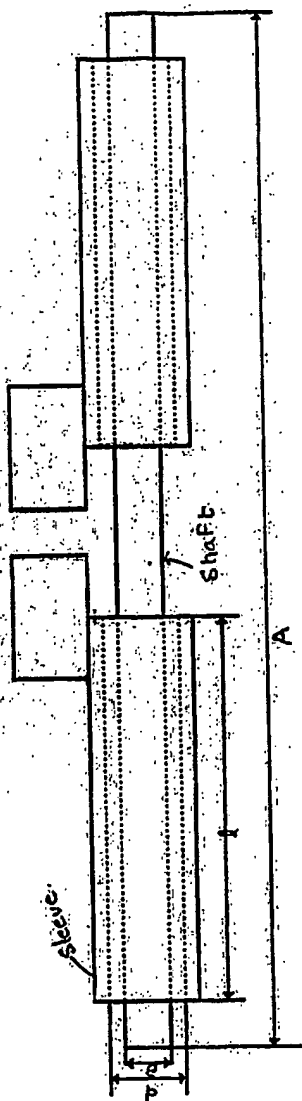


Fig. 13

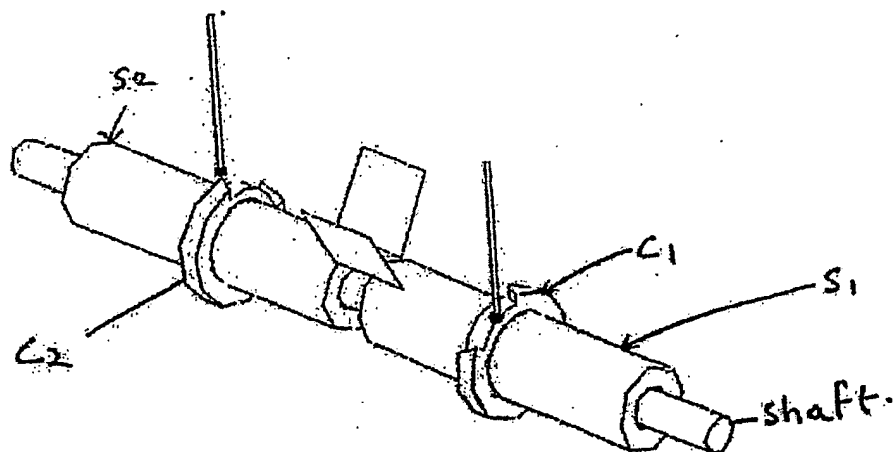


Fig. 13a

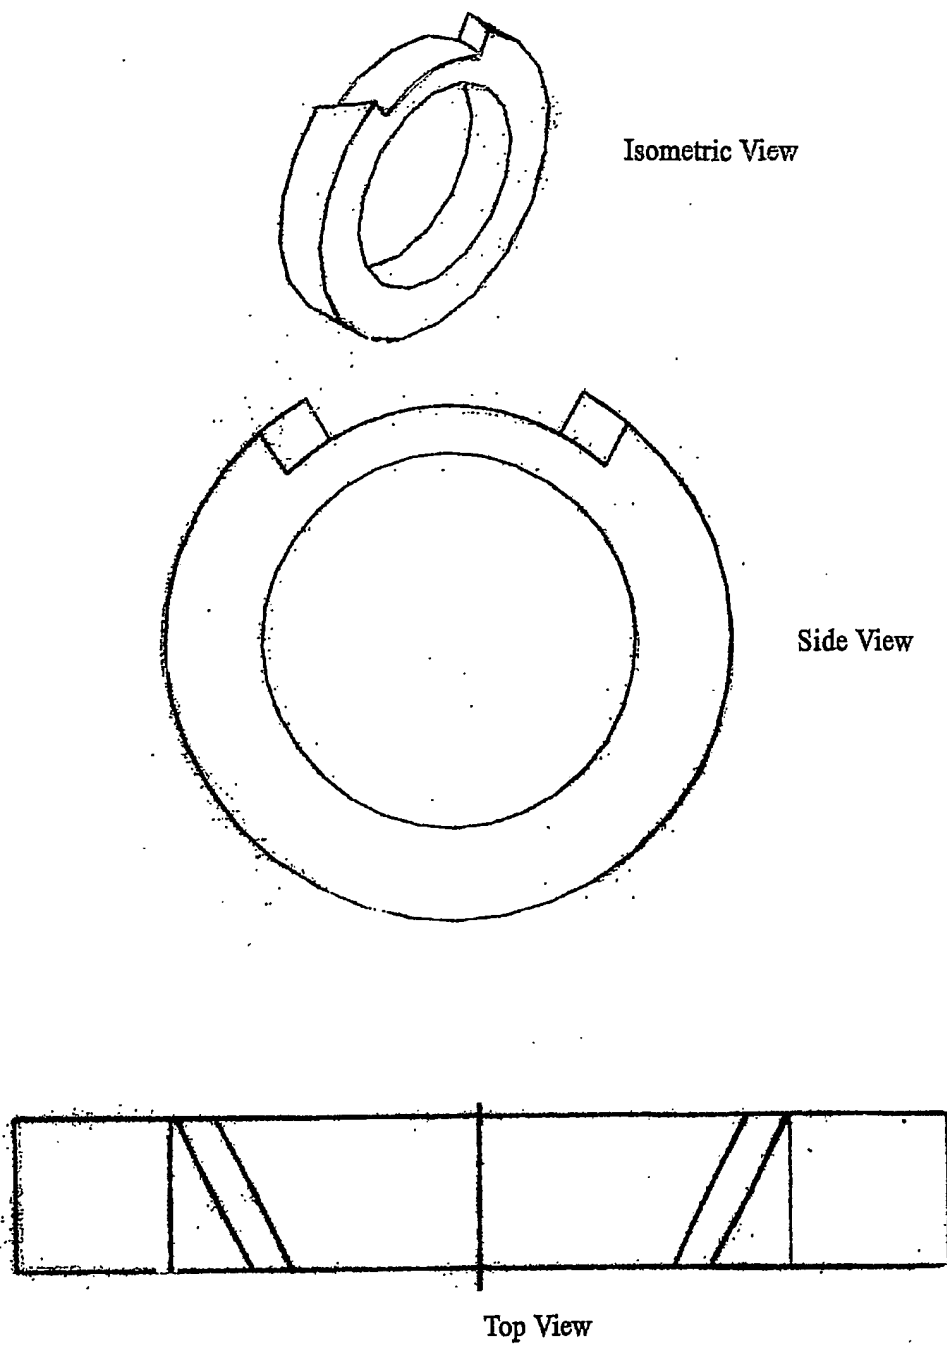


Fig. 13b

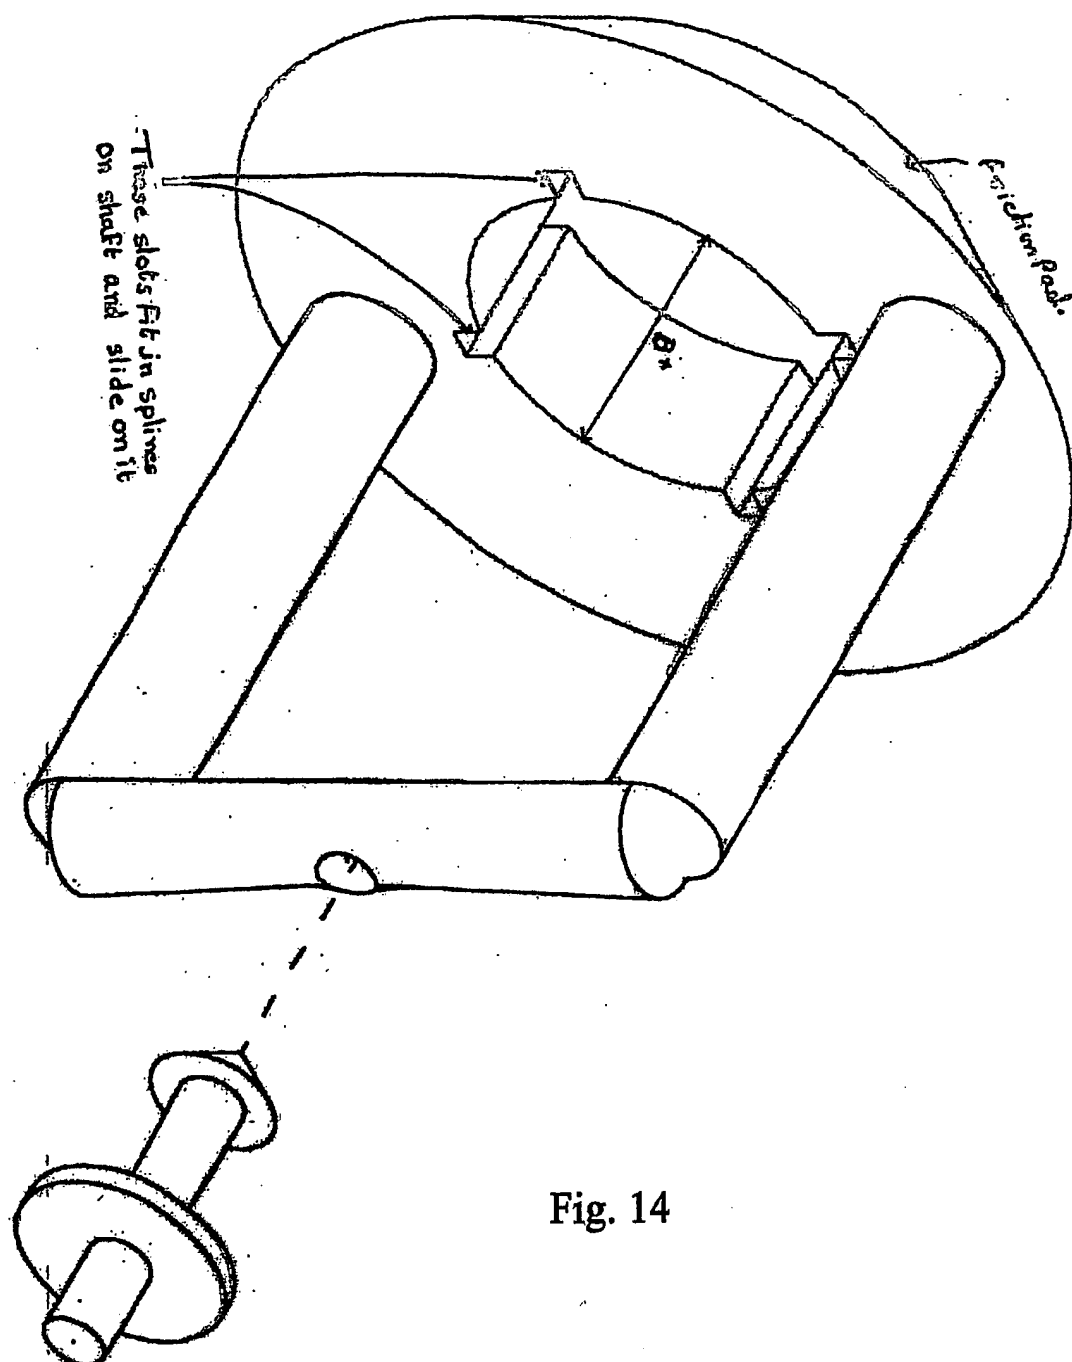


Fig. 14

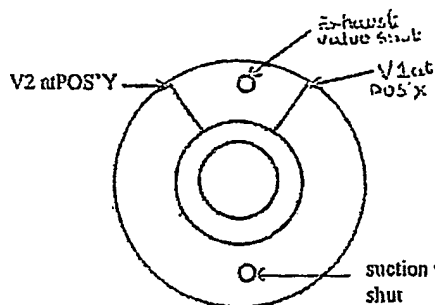


Fig. 17

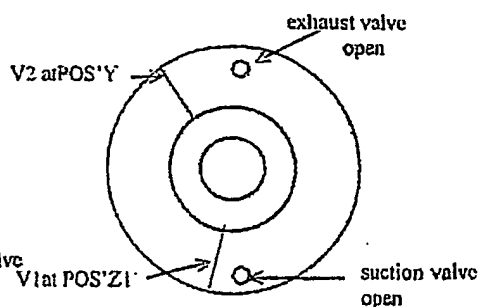


Fig. 18

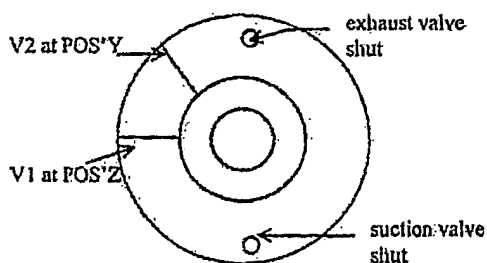


Fig. 19

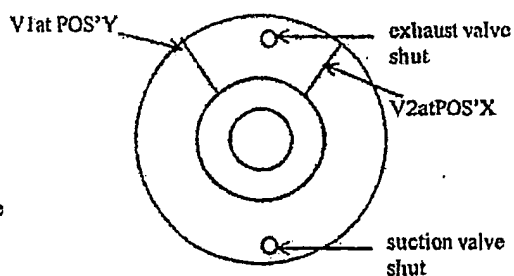


Fig. 20

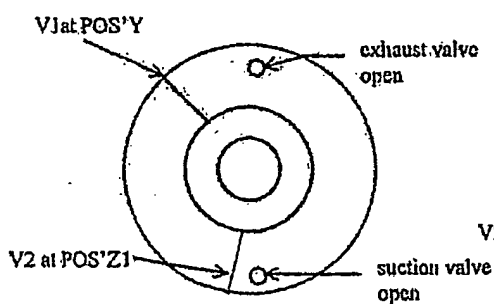


Fig. 21

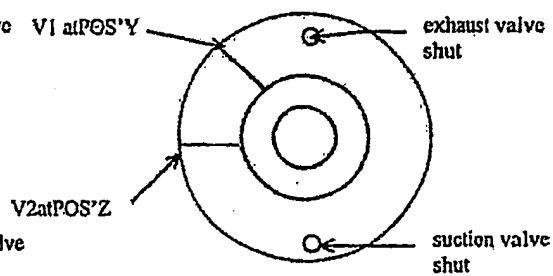


Fig. 22

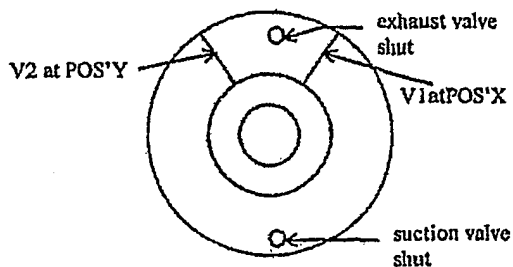


Fig. 23

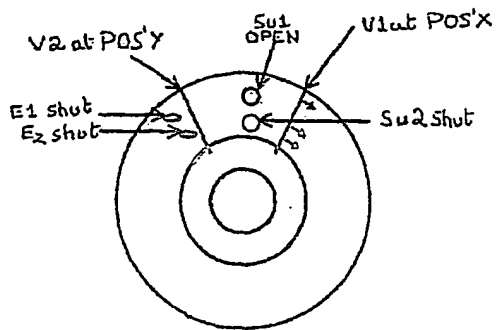


Fig. 24

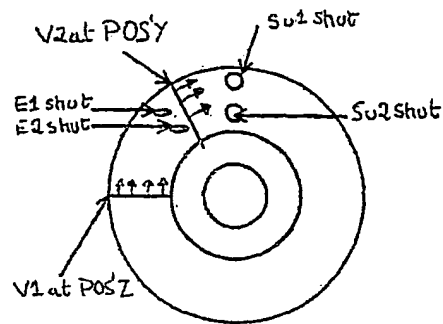


Fig. 25

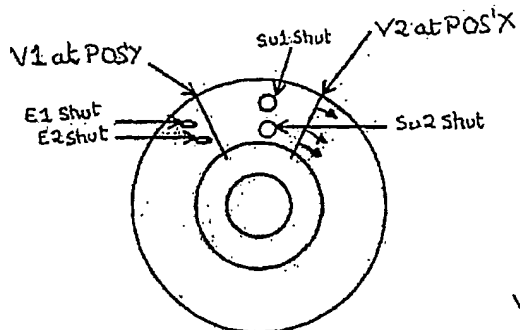


Fig. 26

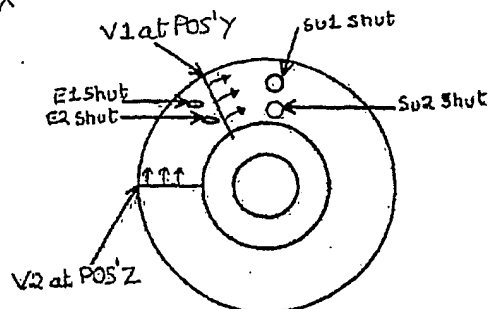


Fig. 27

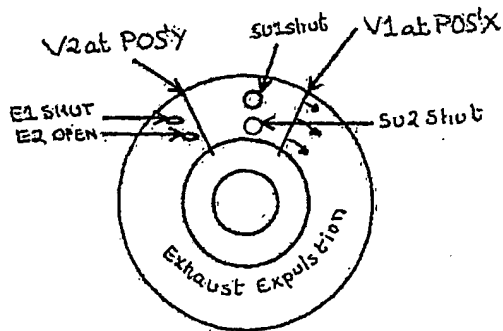


Fig. 28

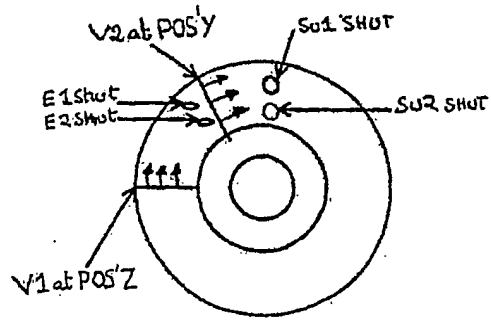


Fig. 29

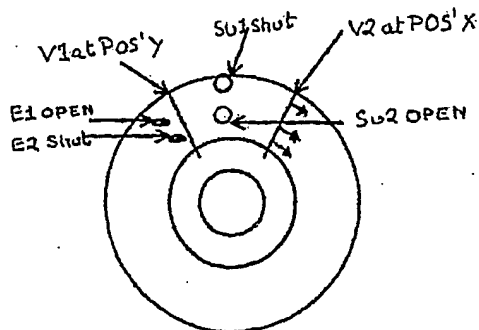


Fig. 30

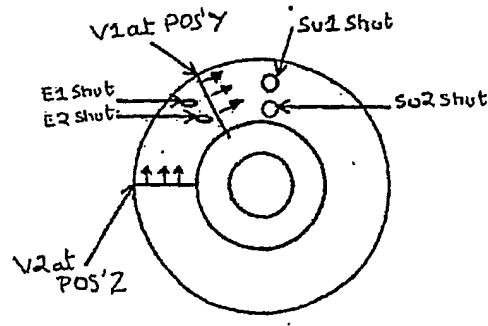


Fig. 31

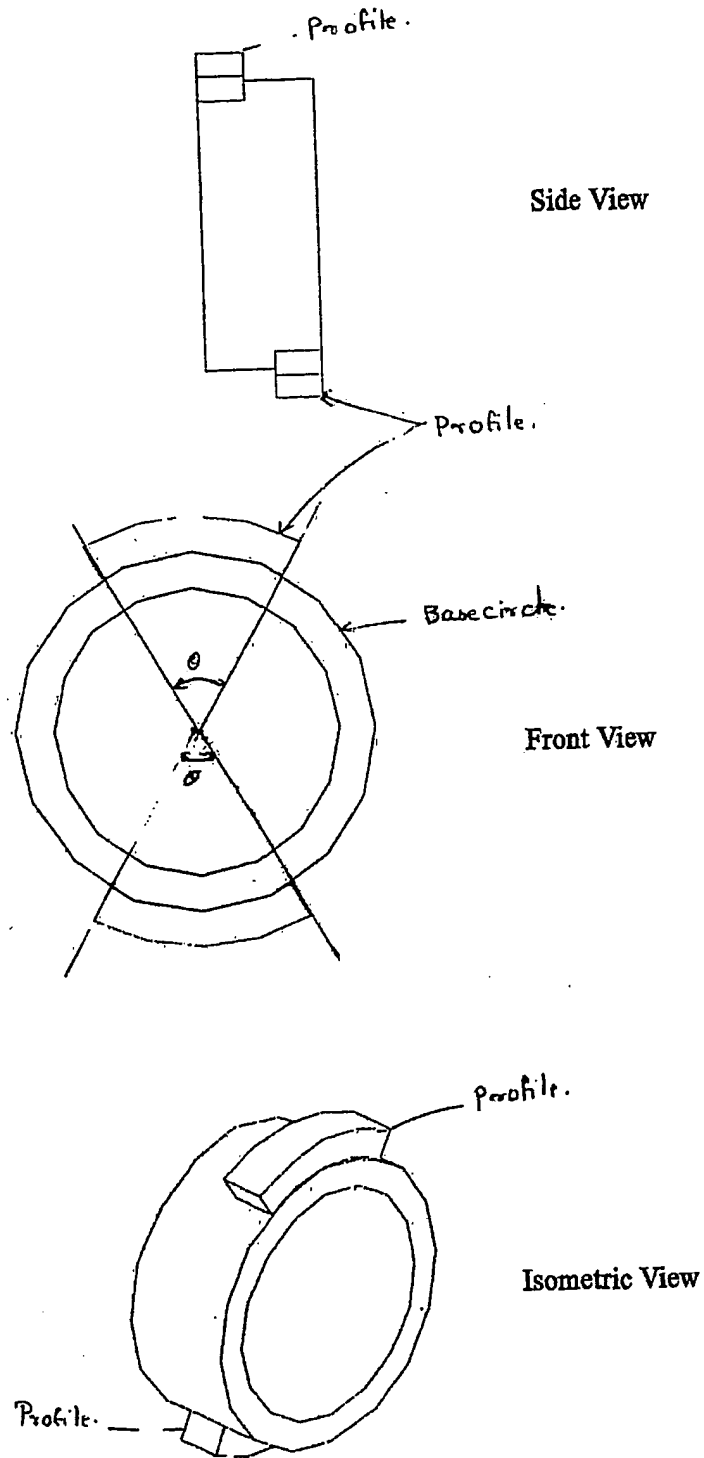


Fig. 32a

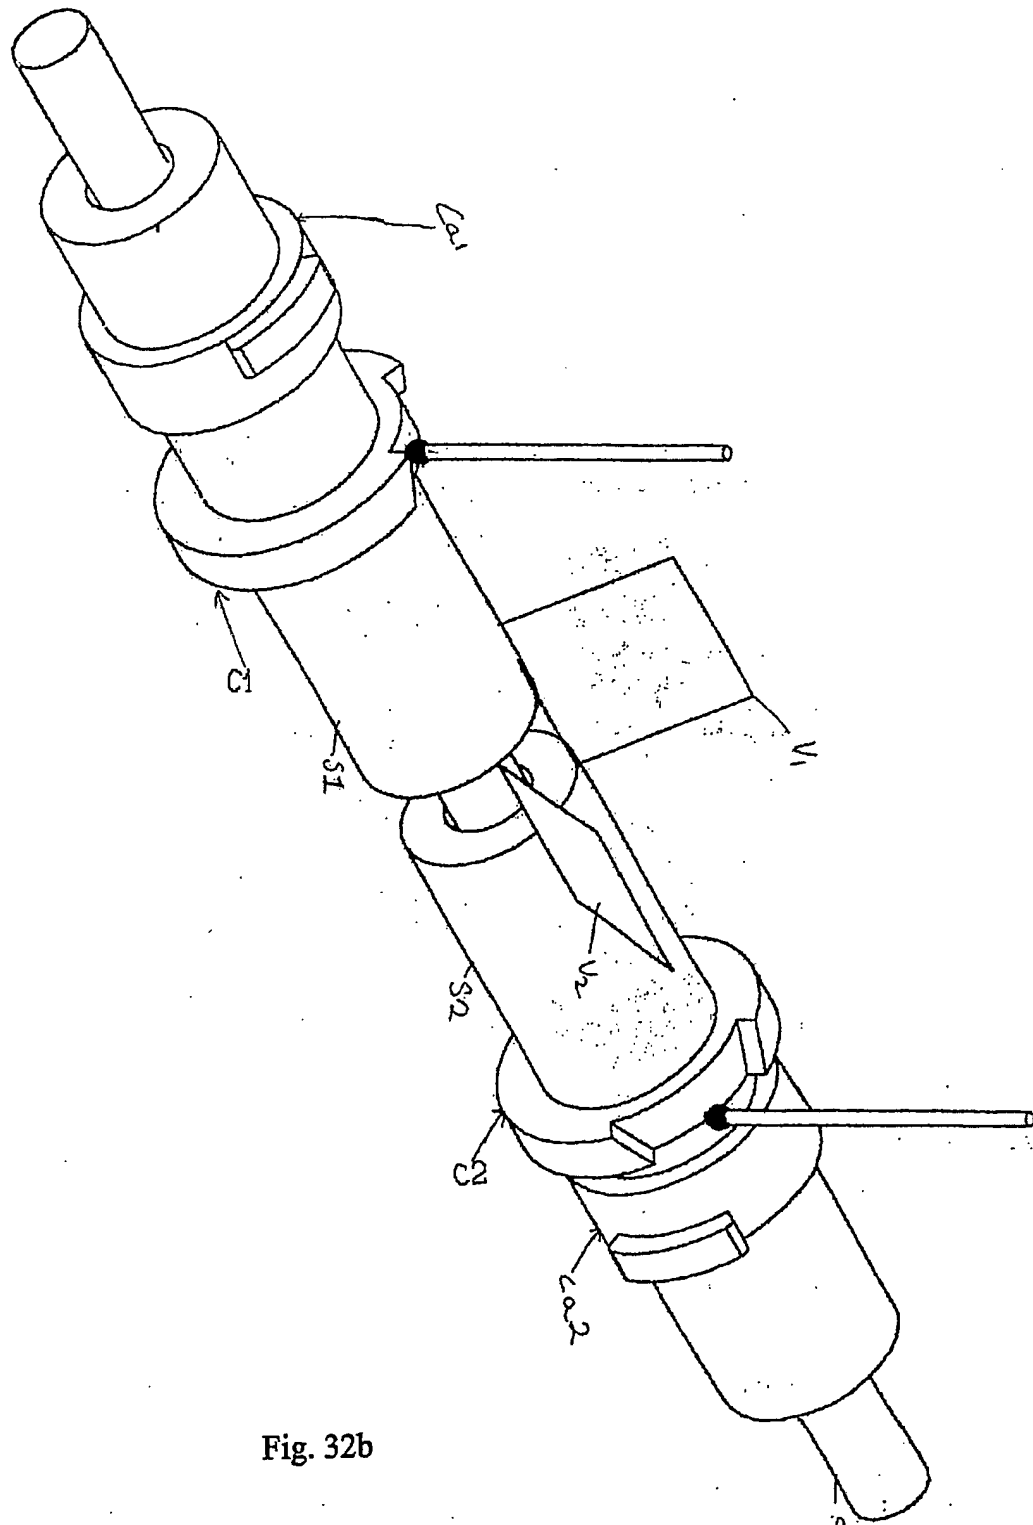


Fig. 32b

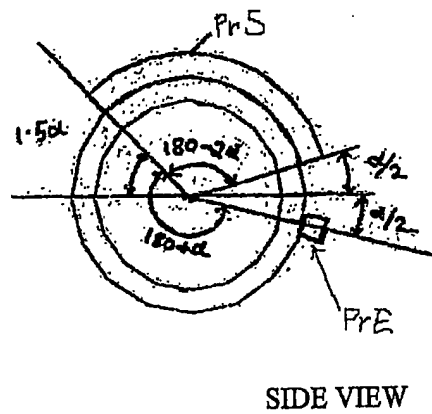
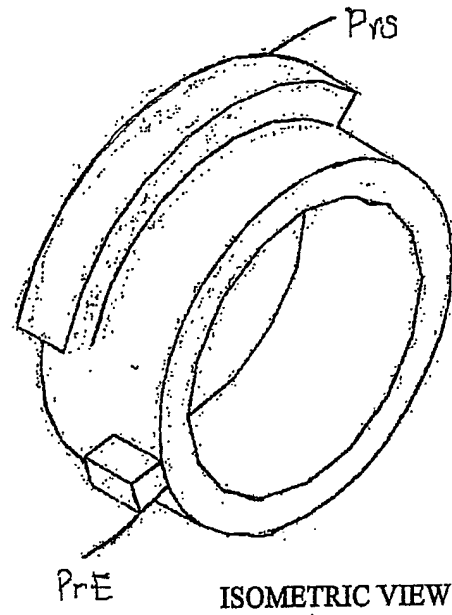


Fig. 33

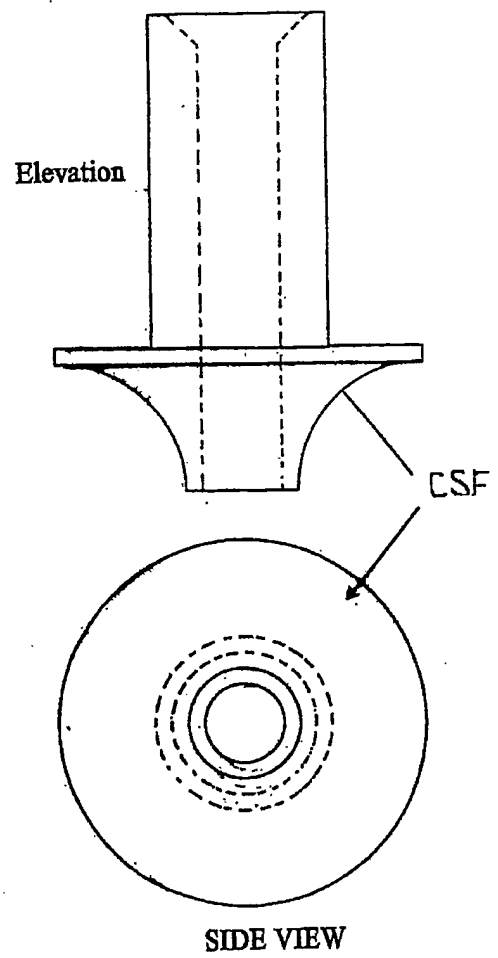


Fig. 34

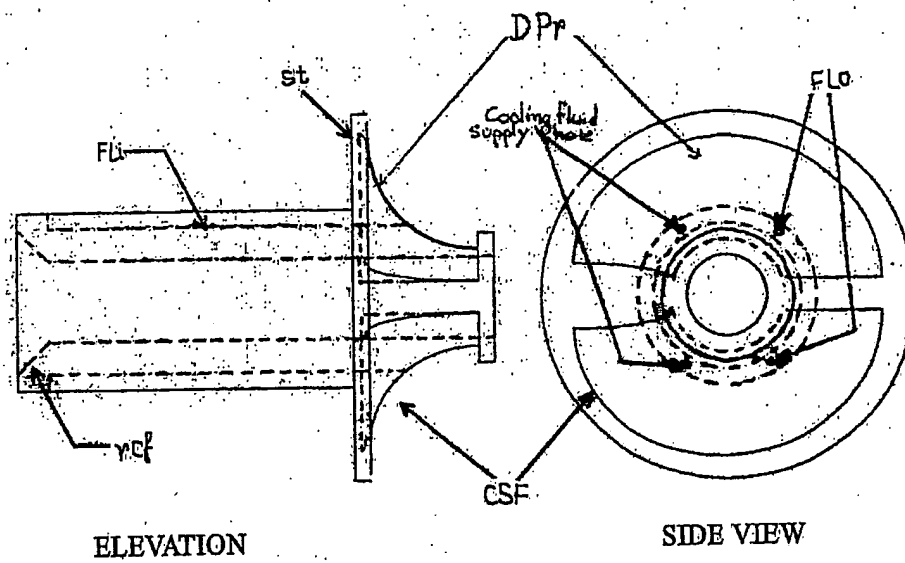


Fig. 35

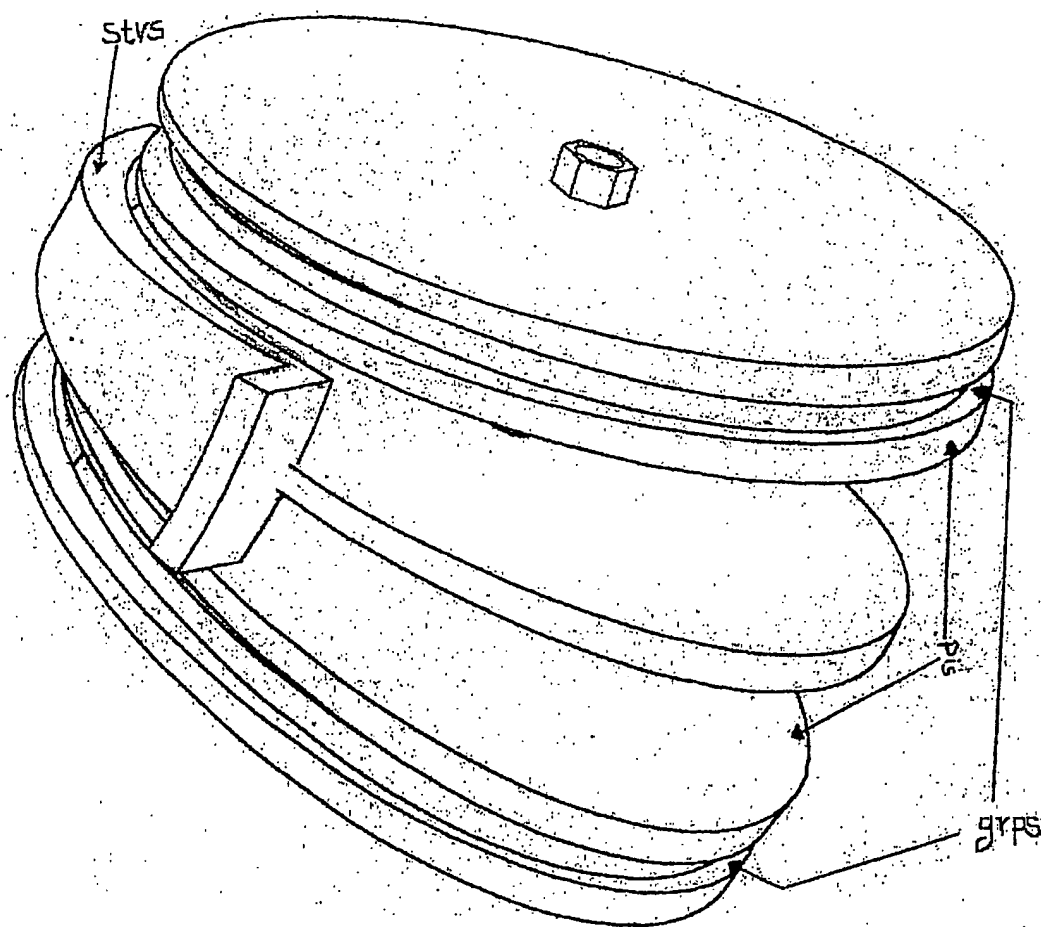


Fig. 36

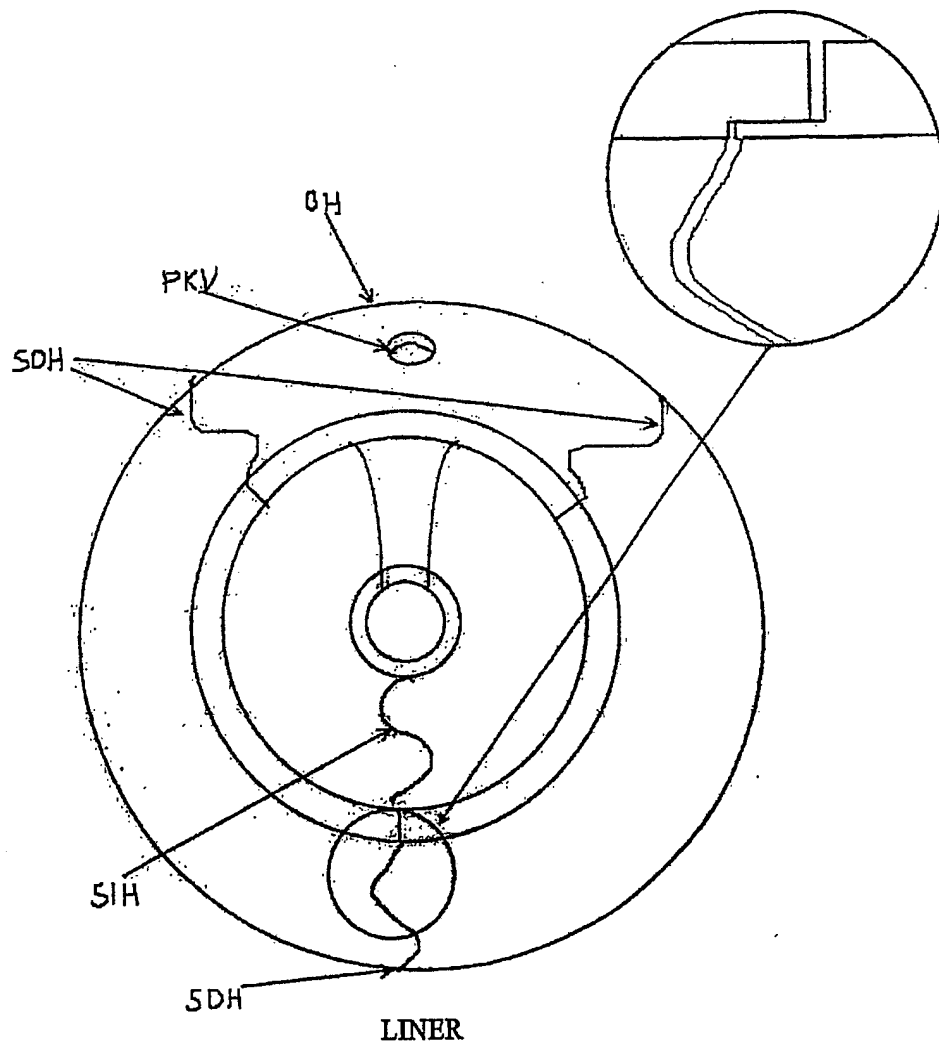


Fig. 37

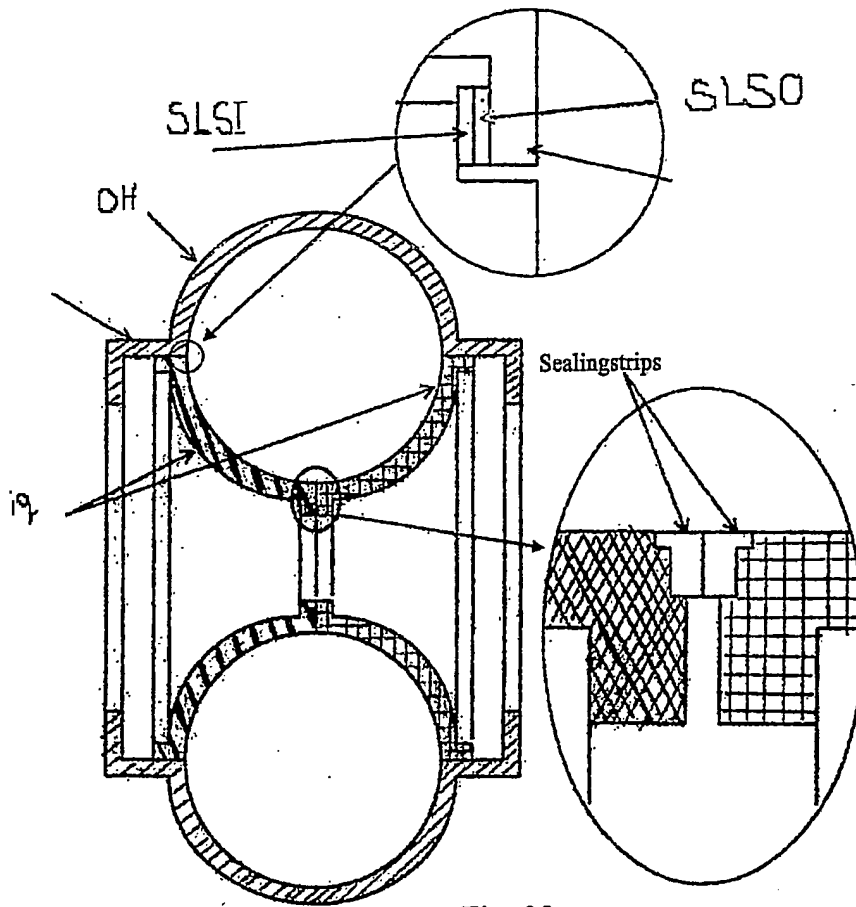


Fig. 38

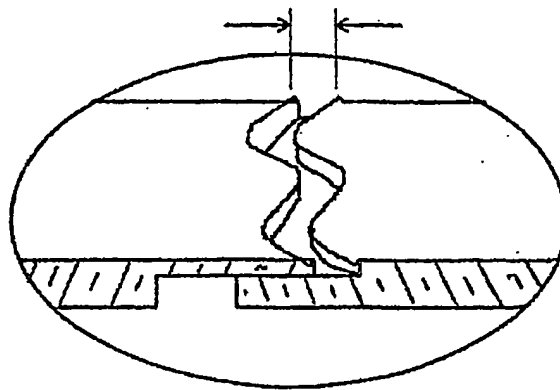


Fig. 39

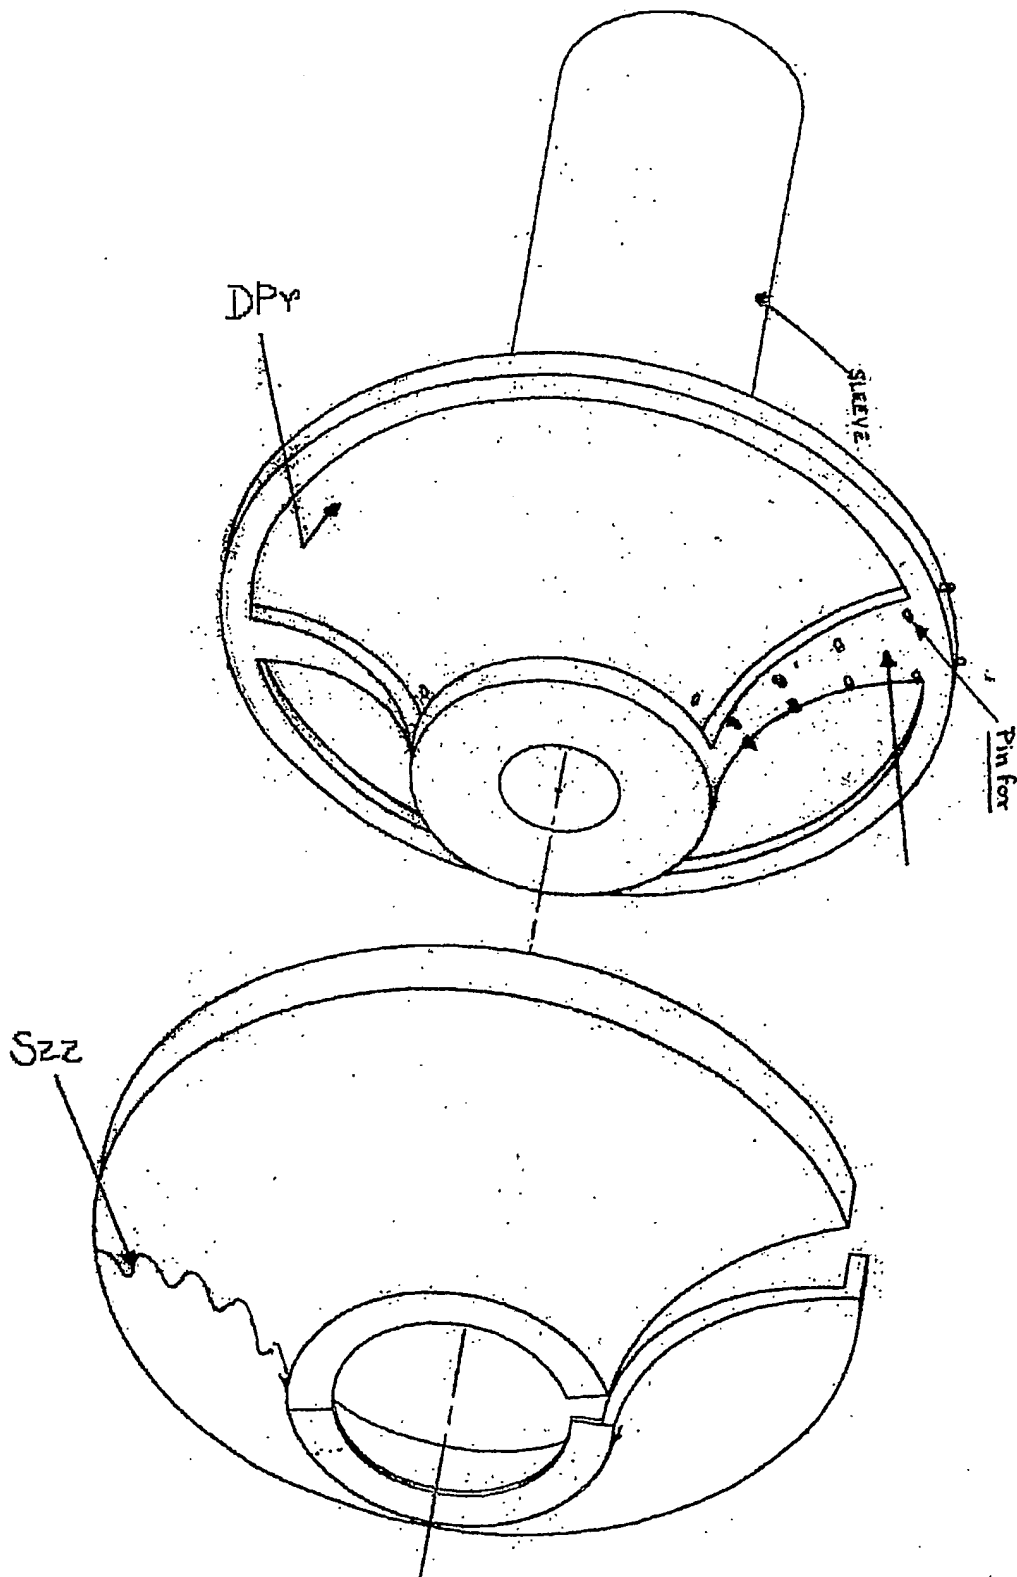


Fig. 40

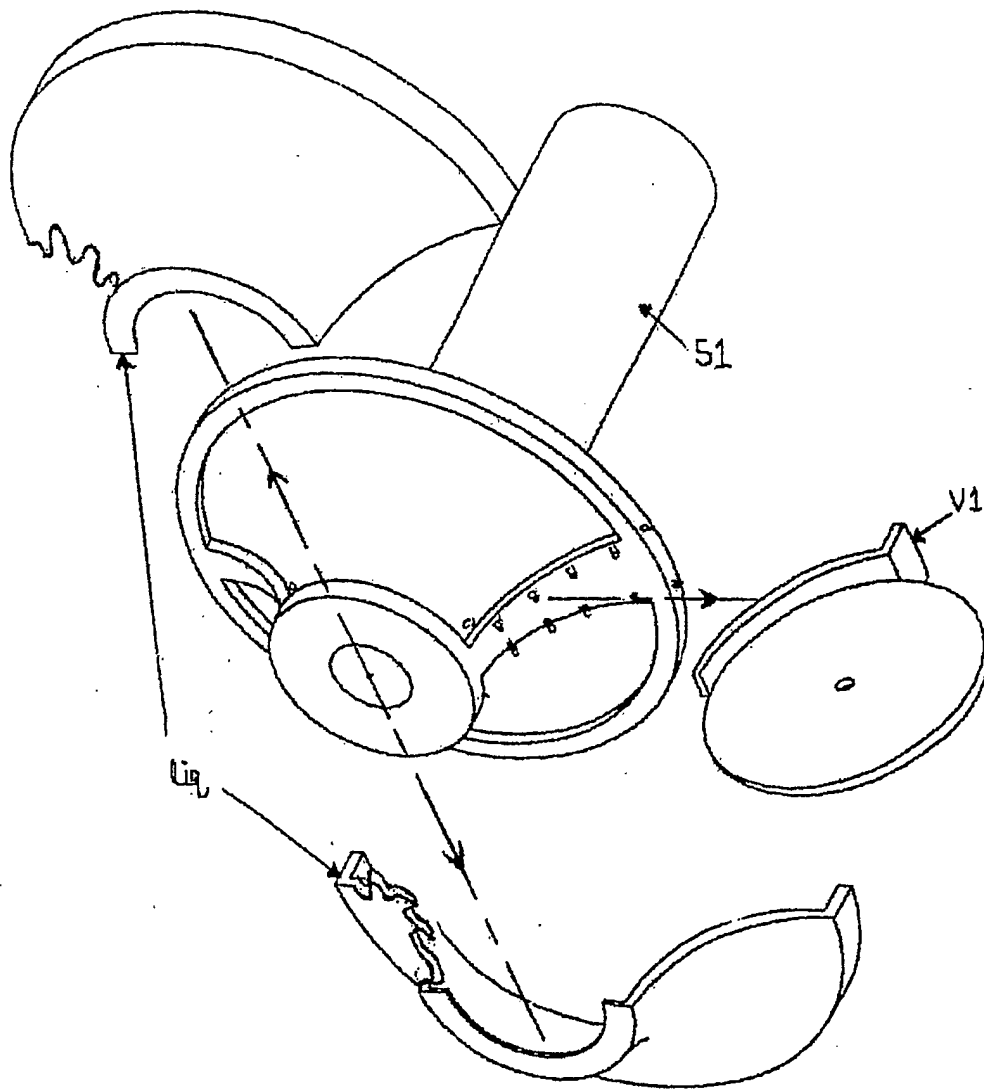


Fig. 41

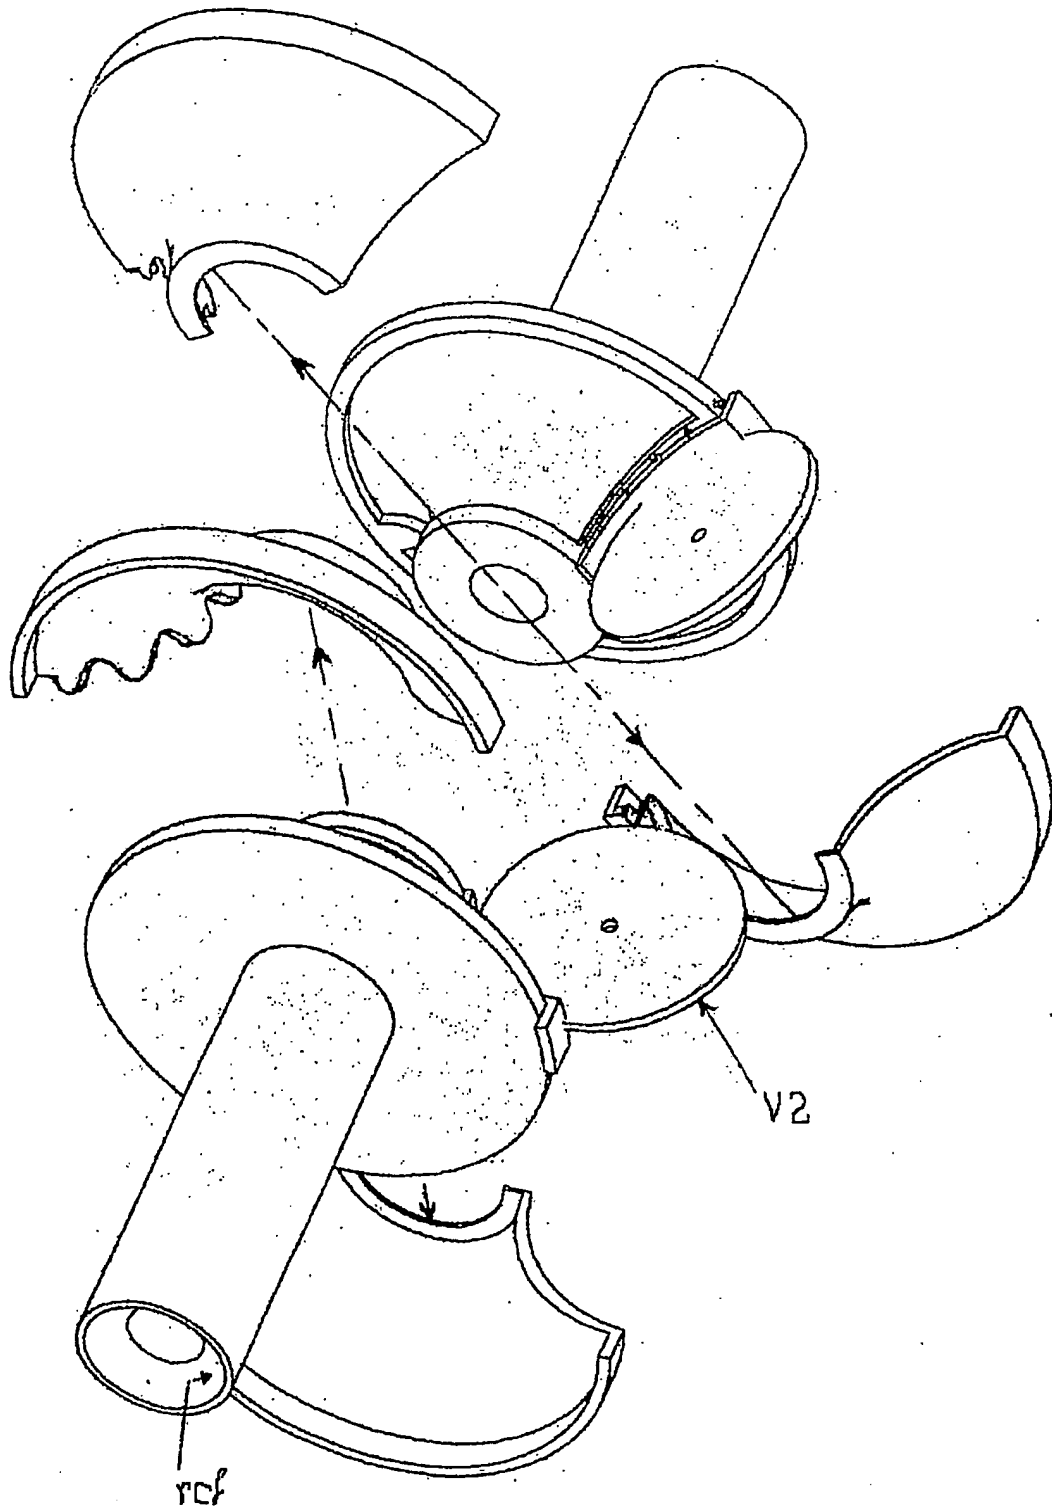


Fig. 42

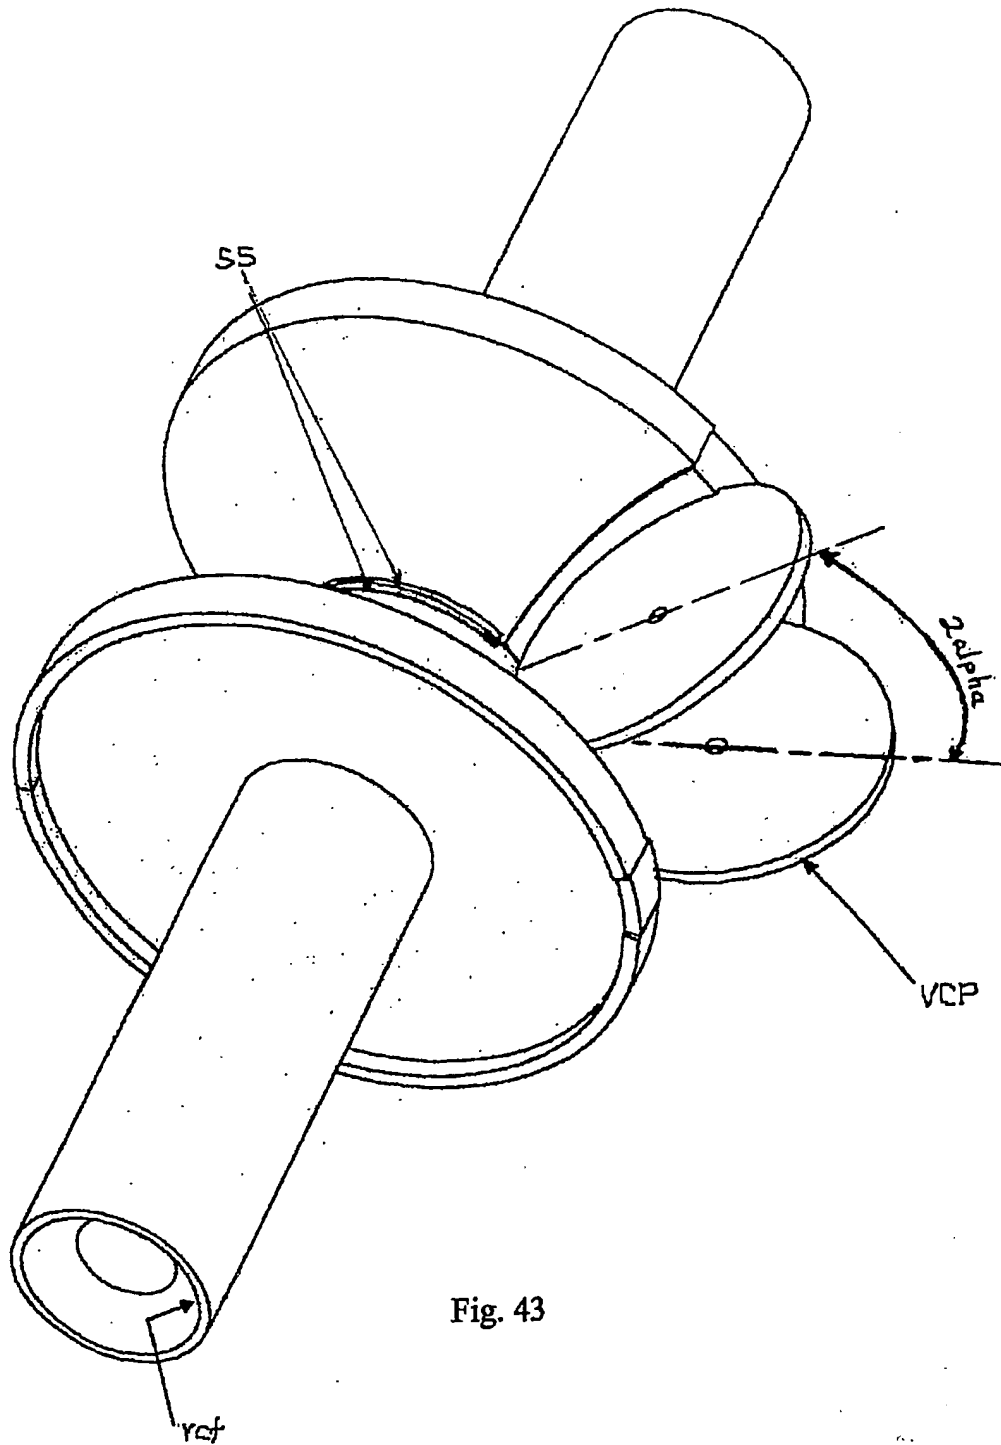


Fig. 43

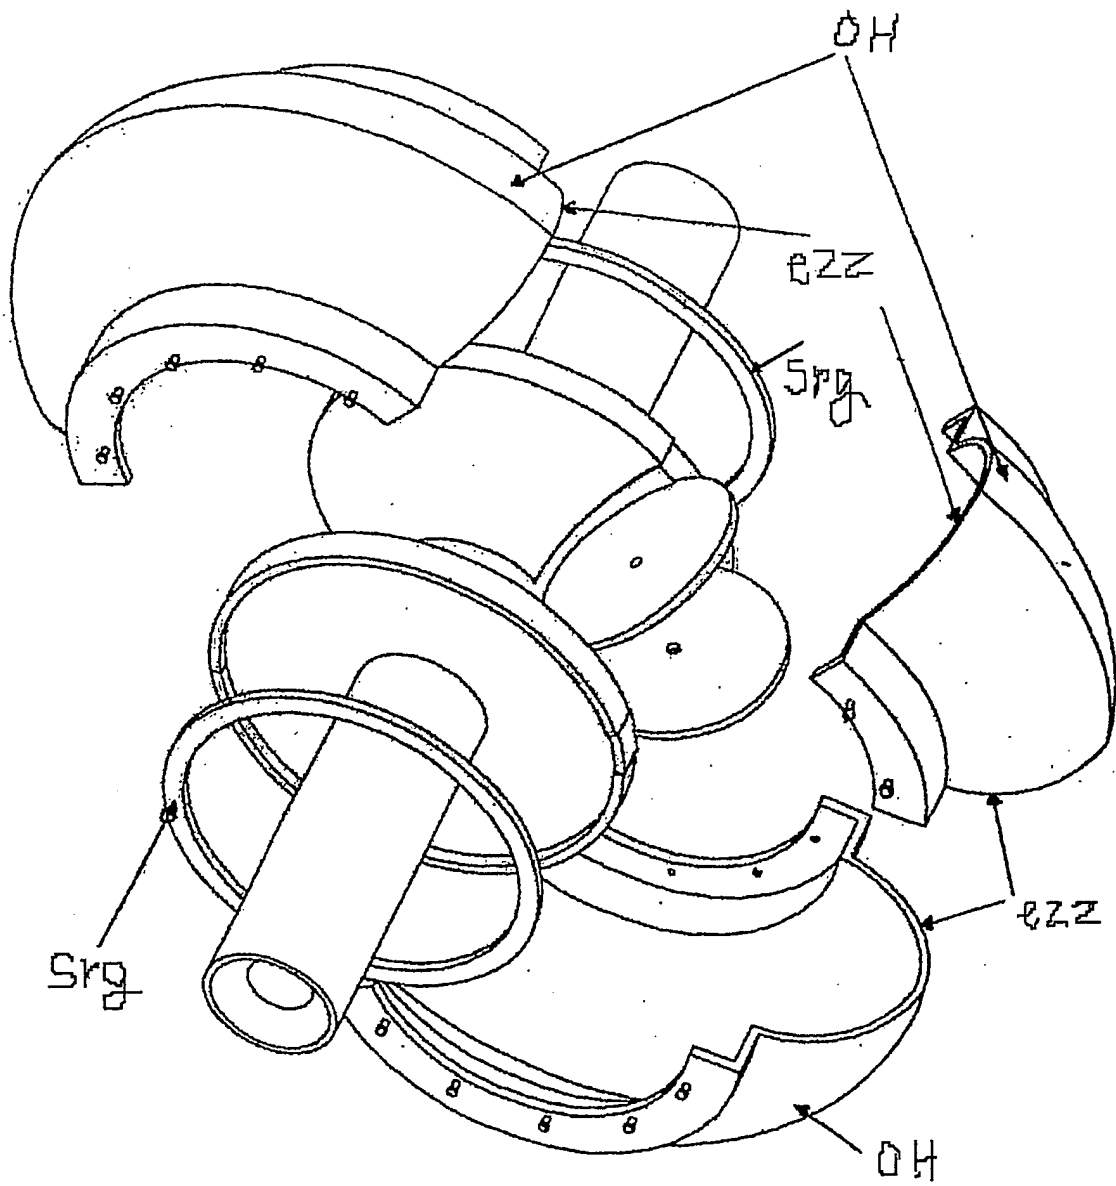


Fig. 44

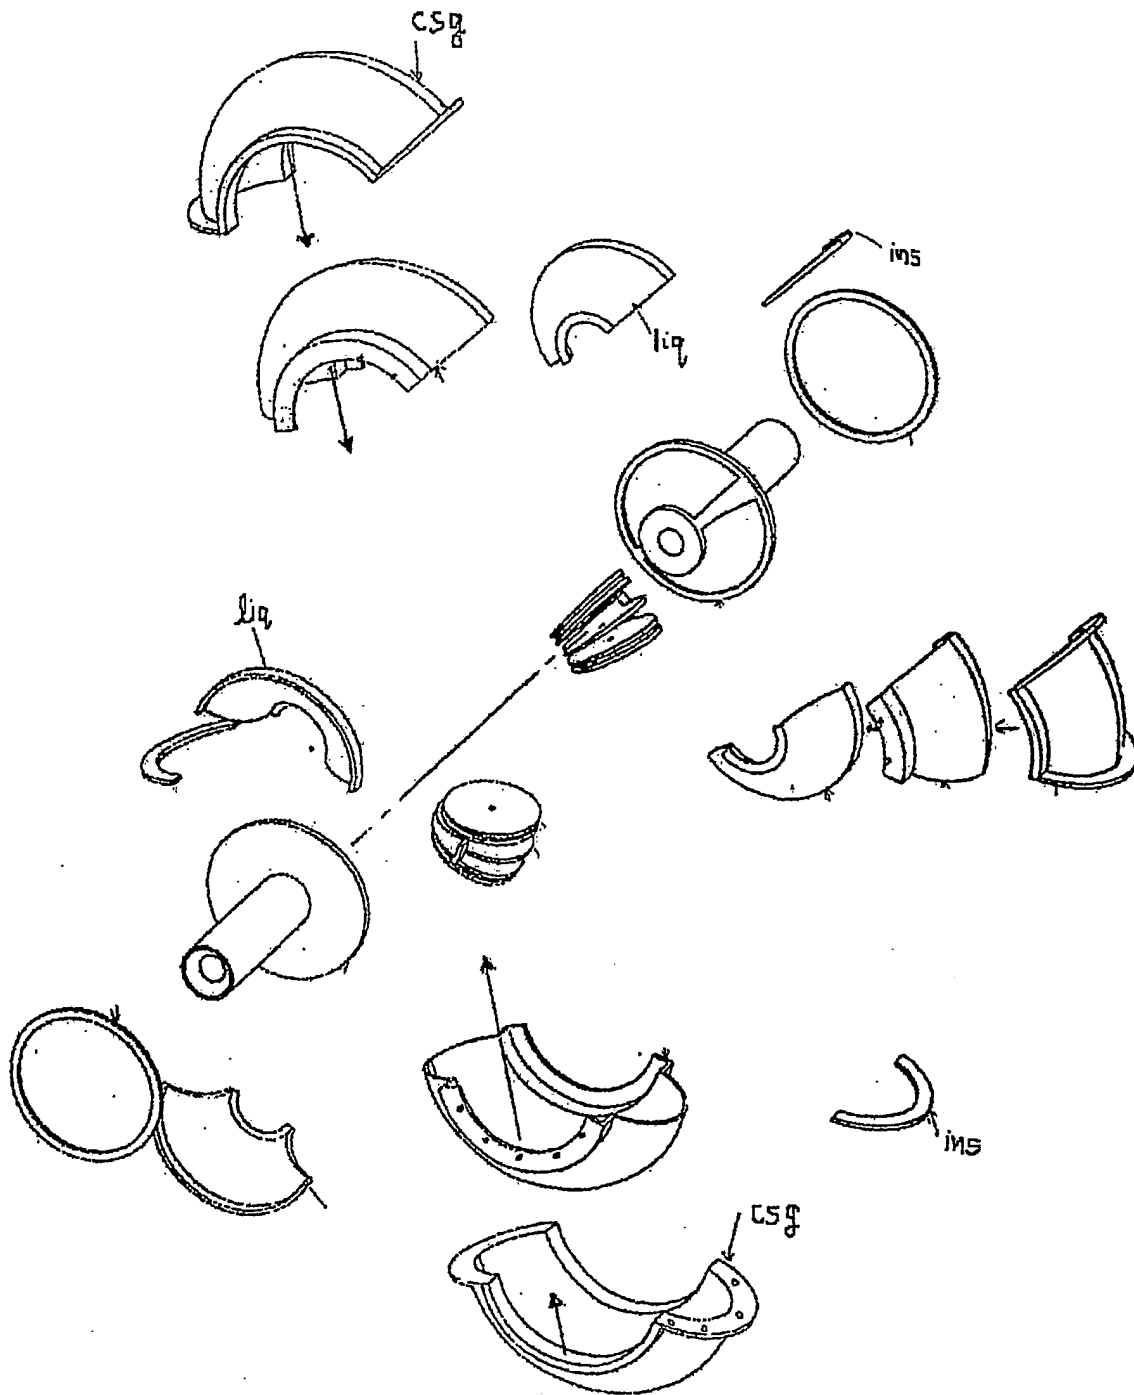


Fig. 45

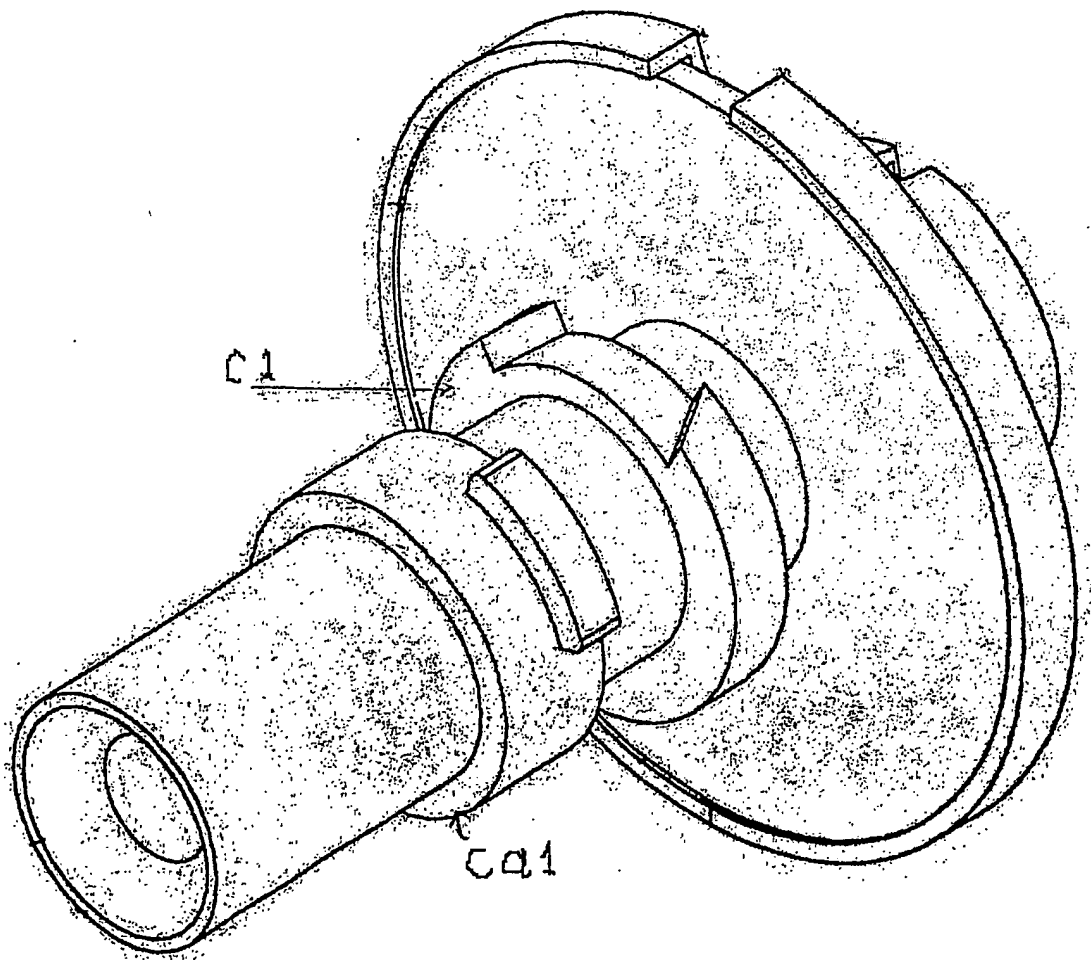


Fig. 24

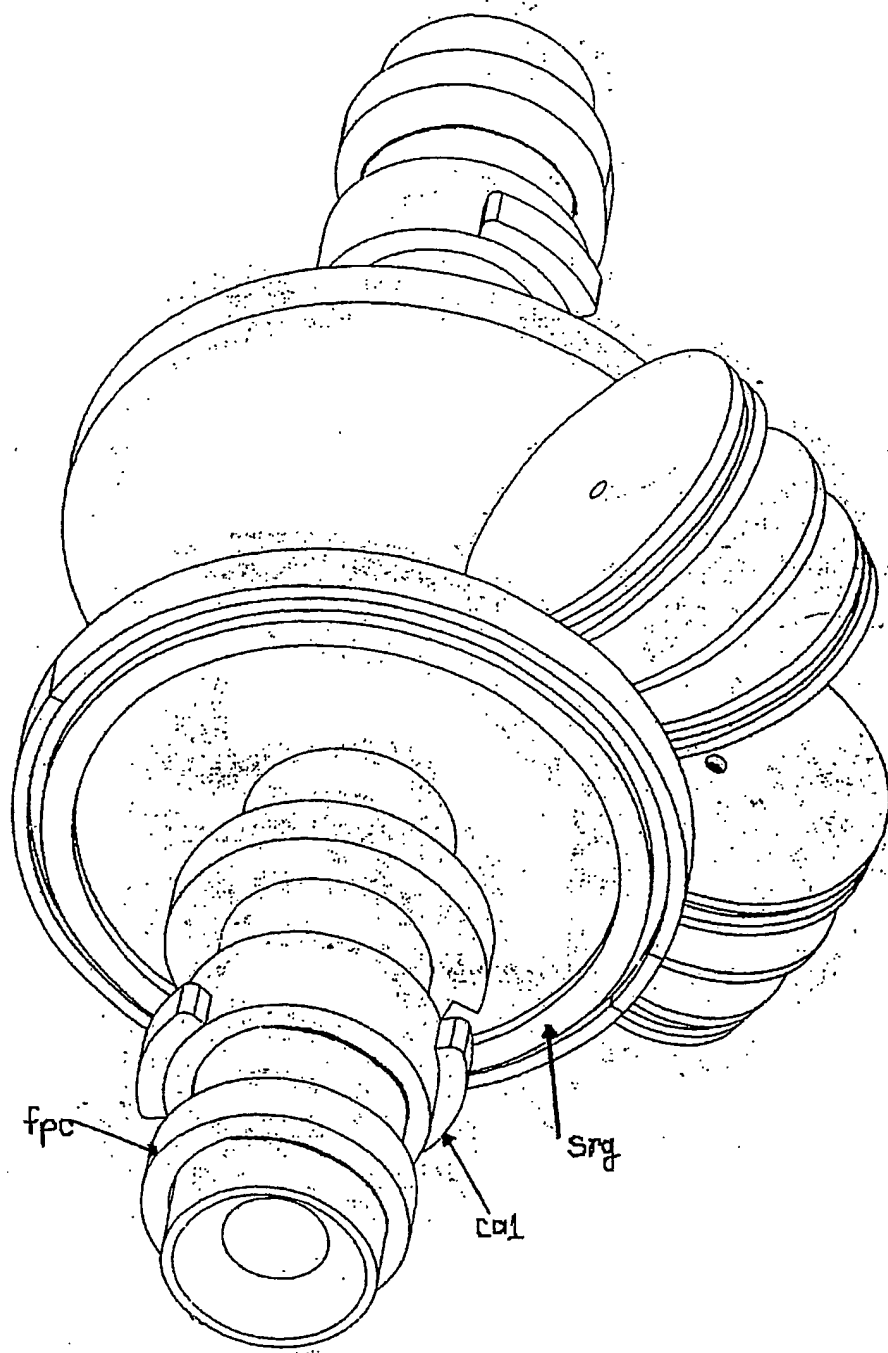


Fig. 47

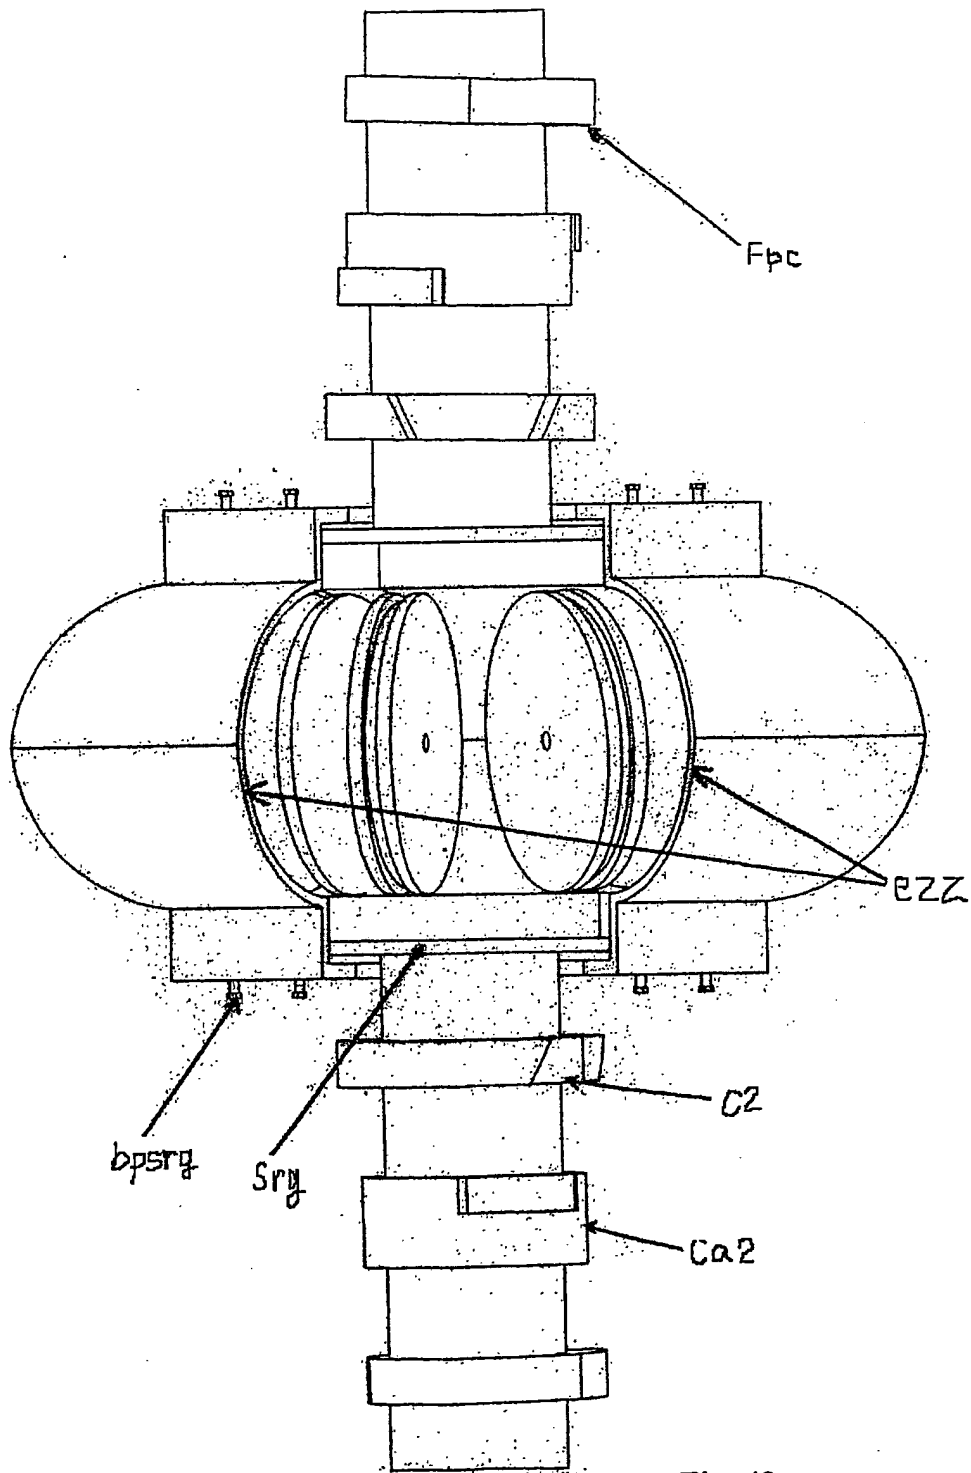


Fig. 48

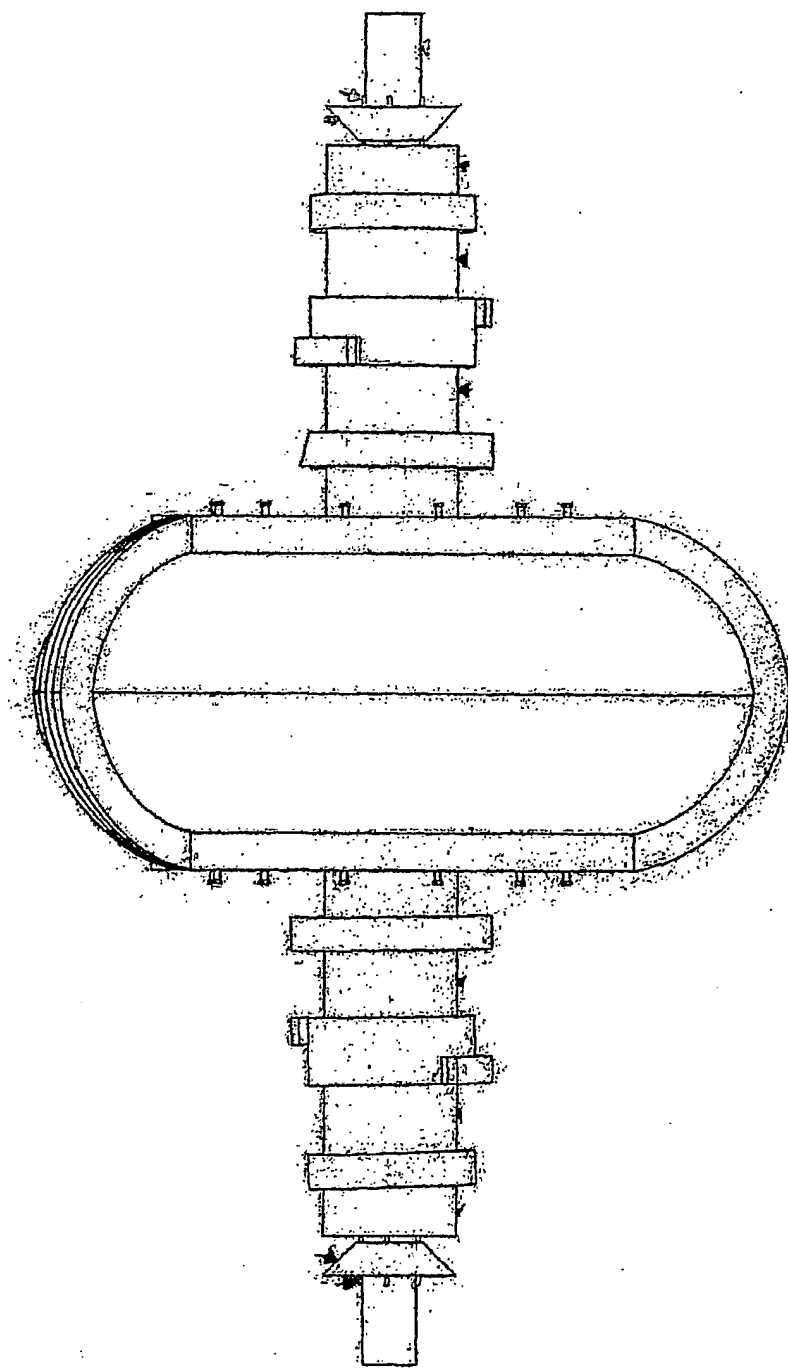


Fig. 49

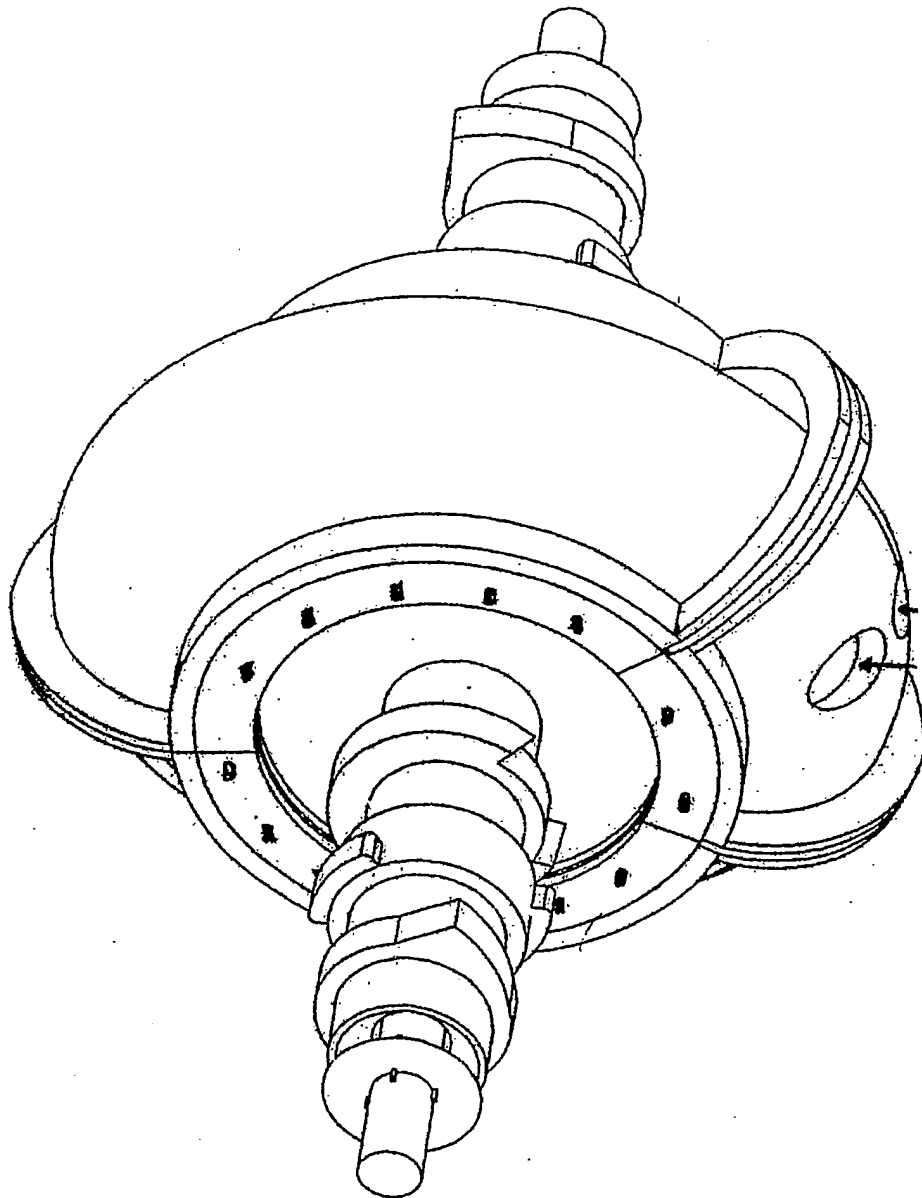


Fig. 50

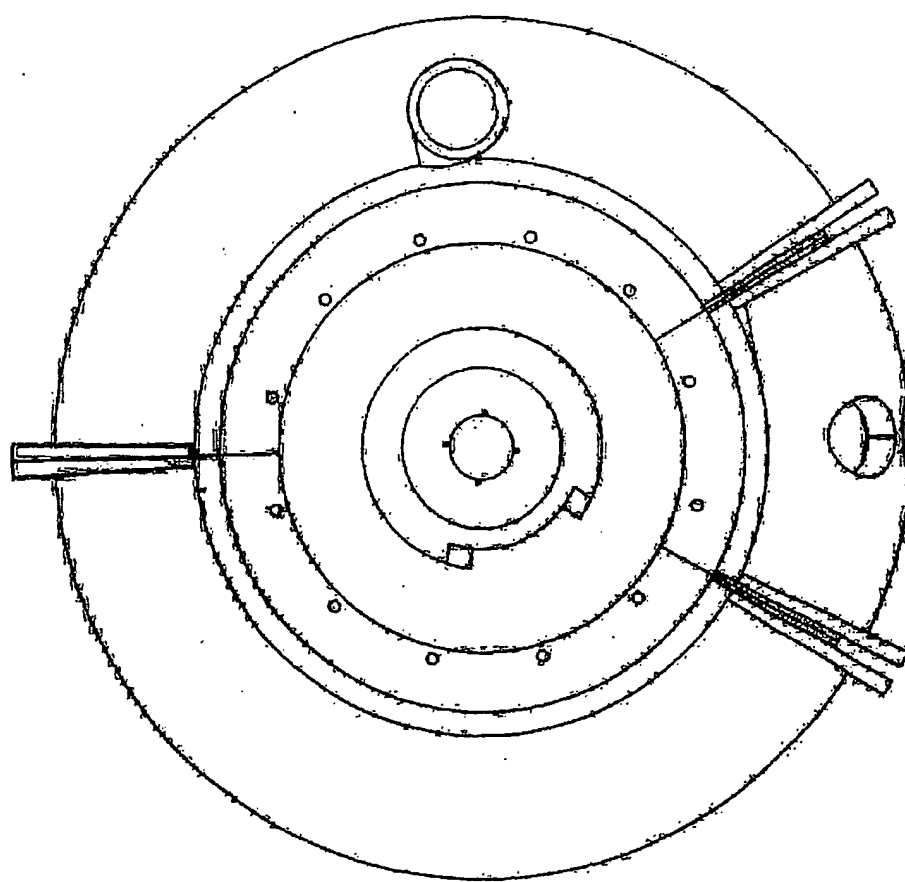


Fig. 51

INTERNATIONAL SEARCH REPORT

Intern d Application No
PCT, ... 03/00167

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 F01C1/067		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 F01C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the International search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 673 027 A (LIPKAU) 23 March 1954 (1954-03-23) column 2, line 35 -column 6, line 36; figures	1,2,4,6, 8,9,12
X	US 1 458 641 A (VOJTECH) 12 June 1923 (1923-06-12) page 1, line 77 -page 3, line 51; figures	1,2,4-12
X	US 4 153 396 A (LANDRY) 8 May 1979 (1979-05-08) column 3, line 4 -column 5, line 65; figures	1,2,4, 8-12
	-/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the International filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the International filing date but - later than the priority date claimed *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *Z* document member of the same patent family		
Date of the actual completion of the international search 12 December 2003		Date of mailing of the international search report 19/12/2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Kapoulas, T

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT, 111 03/00167

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 4 738 235 A (SILVOZA) 19 April 1988 (1988-04-19) column 8, line 6 -column 16, line 61; figures 1-10,14-16,27-31 column 19, line 45 -column 20, line 29; figures 16,17,22-25</p>	1-6,8-12

INTERNATIONAL SEARCH REPORT

Intern: I Application No

PCT/JP 03/00167

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2673027	A	23-03-1954	NONE		
US 1458641	A	12-06-1923	NONE		
US 4153396	A	08-05-1979	NONE		
US 4738235	A	19-04-1988	EP	0338177 A1	25-10-1989